



**KIDC CONNECTOR**

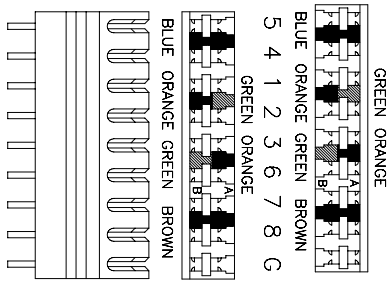

**Color Coding Information**

T568A	T568B
Pin5 WHITE/BLUE	Pin5 WHITE/BLUE
Pin4 BLUE	Pin4 BLUE
Pin1 WHITE/GREEN	Pin1 WHITE/ORANGE
Pin2 GREEN	Pin2 ORANGE
Pin3 WHITE/ORANGE	Pin3 WHITE/GREEN
Pin6 ORANGE	Pin6 GREEN
Pin7 WHITE/BROWN	Pin7 WHITE/BROWN
Pin8 BROWN	Pin8 BROWN


**UNSHIELDED JACK**



**SPECIFICATION MATERIALS :**

- Upper & Button Case : UL ABS.
- KIDC Connector :  
Housing : UL PC.  
Contact Pin : Phosphor bronze with tin plate.  
Printing : T568A & T568B Wiring.
- RJ45 Jack :  
Housing : UL PBT.  
Contact Pin : Phosphor bronze with 50u" gold plating , Flat pin.  
Shielded : Phosphor bronze with tin plate.
- Cable Holder : Phosphor bronze with tin plate.
- Panel Cable Guide : UL ABS.
- P.C.B : 1.6m/m , double side , FR4.

OPTIONAL FOR CABLE THROUGH

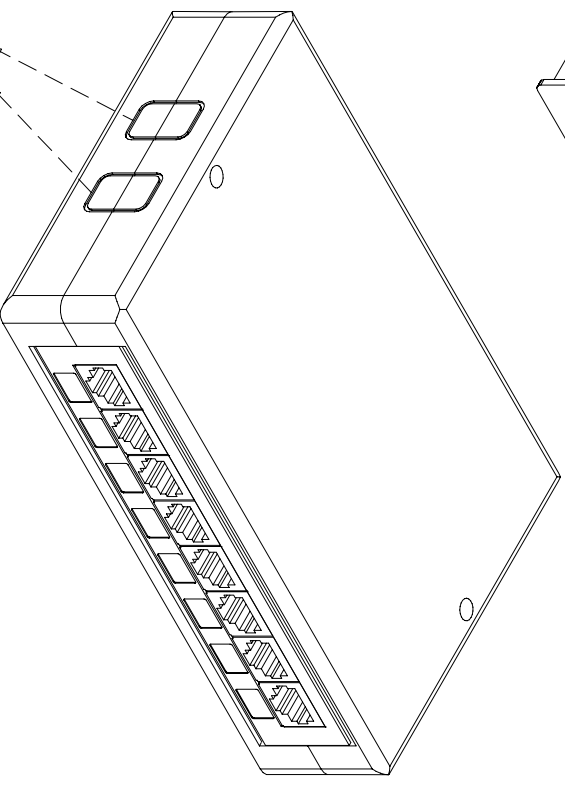

**REMARK:**

SM8CEUS-K1C XX ①

① Color : White or Ivory.

NOTE: TOL ±0.1m/m

		DSGN JACKY 05FEB99		ITEM NO: SM8CEUS-K1CXX	
UNIT	M/M	CHK		APPR	
SCALE	1/2	8 Port Surface Mount Box, Unshielded			
DWG NO: SM8CE USKIDC					