



DATE	REV	DESCRIPTION	BY	CHKD
10/6	A/0	NEW	WZY	YZG

DIREKTRONIK


Direktronik AB tel. 08-52 400 700 www.direktronik.se

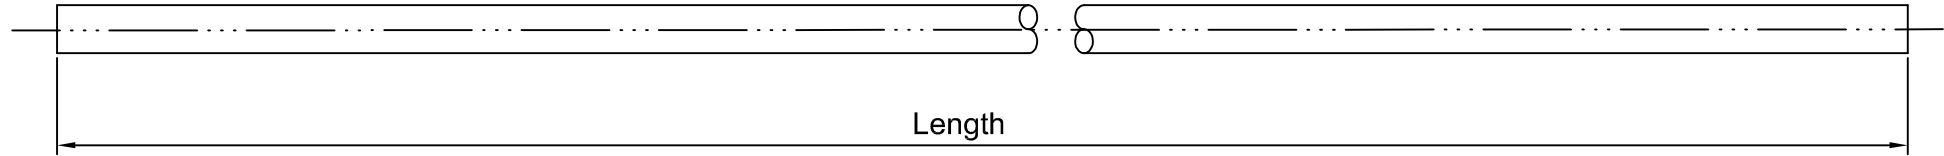

MARKING: <LP721> YFC CAT6A UTP 10 GIGABIT ETHERNET PATCH CABLE ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 & IEC 332.1 24AWGX4P LSOH XXXXXXM

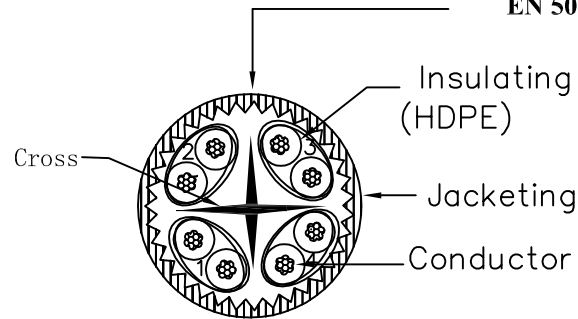

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

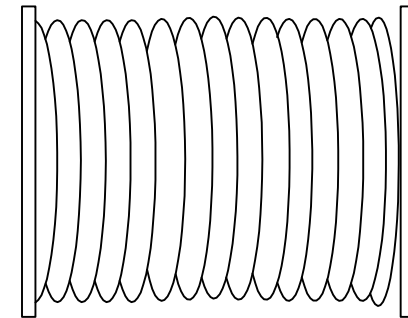

PACKING: 305M/Ro11


Conductor	Bare Copper 24AWG 7/0.196 ± 0.008mm
Insulation	Thickness: MIN at any point: 0.20mm MAX AVG: 0.25mm Diameter: 1.05 ± 0.05mm
Jacketing	LSOH Thickness: MIN at any point: 0.50mm MAX AVG: 0.60mm Diameter: 7.0 ± 0.15mm

WIRE	CAT. 6A UTP STR 24AWG*4P
LENGTH	305m
WIRE COLOR	GY852

Unless specified on the drawing, tolerances are per the follows:

.	± 1
.X	± 0.2
.XX	± 0.05

3RD



DRAW.NO	00086	ITEM	06-8177		
DEPARTMENT	R&D	DRAW	WZY	DATE	2008/10/6
SCALE		CHECKER	APPROVAL		
UNIT	MM	SHEET	1	OF	1