

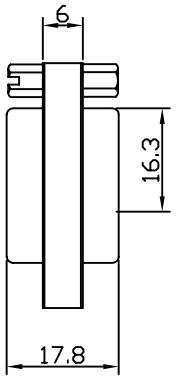



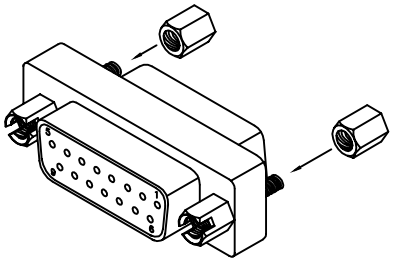



Specification:

Shell: Steel,Tin plated.

Pin contact: Phosphor with gold plated over nickle.

Insulator: PBT & Fiber reinforced 94V0.

Current Rating: 5 AMP.

Dielectric Strength: 1000V for one minute.

Insulator resistance: 1000M ohm min at 500V DC.

Temperature: −55 to 105 degree.

12−12−9