



**DIREKTRONIK**  
Dataprodukter utöver det vanliga

## Introduction:

---

Gate Opener is a remote-control device use for open electricity door or gates. It can simple replace your gate/door opener button and open your door with free phone calling. Two 16A latching relay can be use to control two lines signal.

Cable temperature sensor included for temperature monitor, thermostat control etc functions.


Compact design and DIY installation. Good choice for electricity gate opener, heater controller, industrial power control etc.

## Main Features:

---


- ◆ Work in 4G LTE network: it use industrial 4G module, can be working in 2G/4G network. Free calling to open the gates.
- ◆ Two lines signal control: two 16A big power relay inside to control two lines signal. Only one SIM card to control two lines signal.
- ◆ Temperature sensor included for each device, use for temperature monitor or thermostat control when connected electricity heater on this device.
- ◆ Power failure alarm: automatic send SMS when power lost or power restore.
- ◆ Intruder alarm: one wired sensor support (Wired sensor need to buy separately), when sensor trigger, send SMS alarm.
- ◆ Big quantity number support: max store 204 users to control the device.

## Product structure:

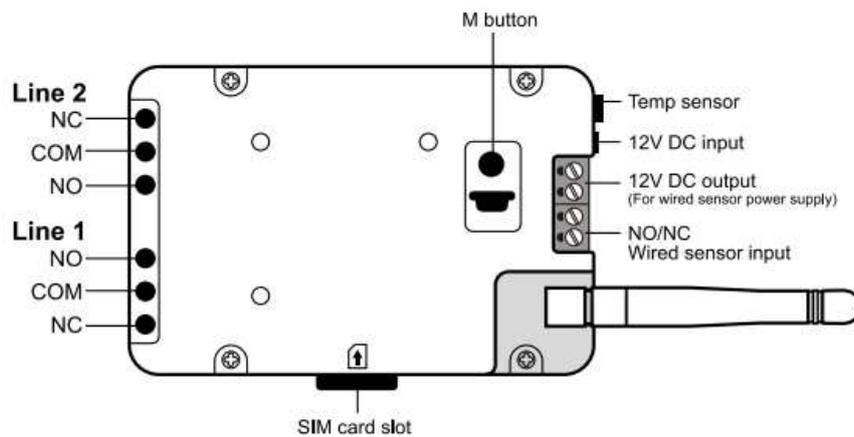

## Working p

Each relay has three terminals: COM, NO and NC, middle COM terminal will connect NO or NC terminal. When SMS reply power ON, COM terminal connect with NO terminal and disconnect with NC terminal; when SMS reply power OFF, COM terminal connect with NC terminal and disconnect with NO terminal.

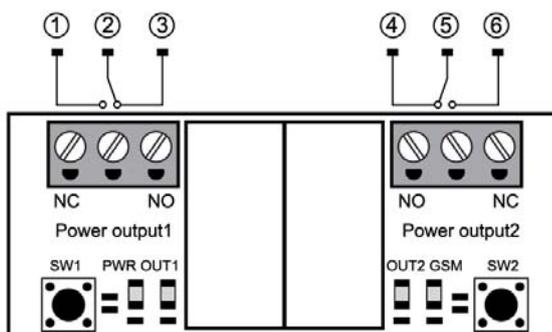

**Use to open door:** When user press button to open door, its make button two lines connect 1-2 seconds, then disconnect. It can connect two lines to COM and NO terminal, calling the device, it will connect COM and NO terminal for 3 seconds; then its like you press the button and open the door.

**Use to control power:** It can connect 220V Fire lines input onto Line-1 NO terminal; connect 220V Zero line input onto Line-2 NO terminal; connect output onto Line-1 and Line-2 COM terminal. Then it can send SMS to turn on/off power; also can set thermostat control to make power auto on/off according temperature settings.

## Technical Specification:

Product Size	113×72×30 mm
4G frequency (Cat 1)	LTE FDD: B1/B3/B7/B8/B20/B28A GSM: B3/B8
Power input	12V DC 1A
Relay control	SMS or phone calling
Relay type	16A Latching relay 2pcs
Max loading	16A 3500W
SIM card	PUSH SIM slot, Normal Size SIM 1.8V/3.0V socket
Indicators	Three blue LED, GSM indicator/Line1 output/Line2 output
Temperature sensor	DS18B20, -30—100 degree
Wired sensor type	NO/NC trigger (no power input)
Standby power consumption	20 mA
Operating temperature	-30~+50℃