


PLIOGRAPH^{PLUS}


Material: PVC
Colour: transparent
Operating temperatures: -20 to +90°C

Application: PLIOGRAPH^{PLUS} carriers can be used to mark cables with PLIOGRAPH^{PLUS} rings and labels, 14-1177 plates or M1P-M45 profiles.


Available in boxes, in lengths of 0.60 m for cutting as required.

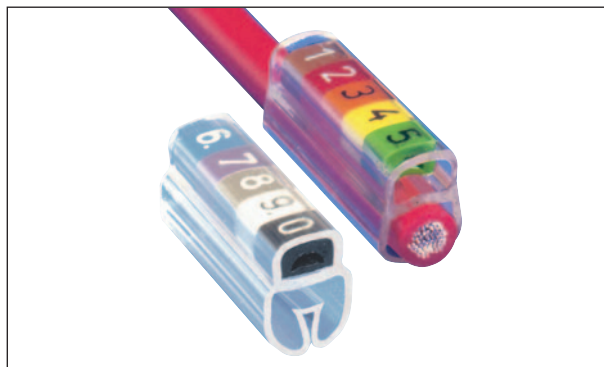


type	article number	Ø wire o.d. mm	for number max. of legends		 pcs
			Type 150	Type 200	
Transparent carriers length 10 mm (supplied in bags)					
33-100	0365 0101 000	1,1 - 3,3	3	4	100
45-100	0365 0102 000	1,5 - 4,5	3	4	100
80-100	0365 0103 000	3 - 8	3	4	100
130-100	0365 0104 000	6 - 13	3	4	100
220-100	0365 0105 000	10 - 22	3	4	100
Transparent carriers length 18 mm (supplied in bags)					
33-180	0365 0111 000	1,1 - 3,3	6	8	100
45-180	0365 0112 000	1,5 - 4,5	6	8	100
80-180	0365 0113 000	3 - 8	6	8	100
130-180	0365 0114 000	6 - 13	6	8	100
220-180	0365 0115 000	10 - 22	6	8	100
Transparent carriers length 25 mm (supplied in bags)					
33-250	0365 0121 000	1,1 - 3,3	8	11	100
45-250	0365 0122 000	1,5 - 4,5	8	11	100
80-250	0365 0123 000	3 - 8	8	11	100
130-250	0365 0124 000	6 - 13	8	11	100
220-250	0365 0125 000	10 - 22	8	11	100
Transparent carriers length 32 mm (supplied in bags)					
33-320	0365 0131 000	1,1 - 3,3	10	14	100
45-320	0365 0132 000	1,5 - 4,5	10	14	100
80-320	0365 0133 000	3 - 8	10	14	100
130-320	0365 0134 000	6 - 13	10	14	100
220-320	0365 0135 000	10 - 22	10	14	100
300-320	0365 0136 000	13 - 30	10	14	100
Transparent carriers in length 0,60 m for markings requiring lengths greater than shown above (supplied in boxes)					
33-0	0365 0151 000	1,1 - 3,3			45
45-0	0365 0152 000	1,5 - 4,5			28
80-0	0365 0153 000	3 - 8			18
130-0	0365 0154 000	6 - 13			12
220-0	0365 0155 000	10 - 22			6
300-0	0365 0156 000	13 - 30			3




33-180




45-180



80-180








130-180



220-180



300-320



B5/2-01




B5/2-03



B5/2-04



B5/2-04




PLIOGRAPH^{PLUS}


Material: PVC
Colours: transparent
Operating temperatures: -20 bis +90°C

Application: PLIOGRAPH^{PLUS} carriers can be used to mark cables with PLIOGRAPH^{PLUS} rings and labels, 14-1177 plates or M1P-M45 profiles.



This double system allows for 2-sided marking.

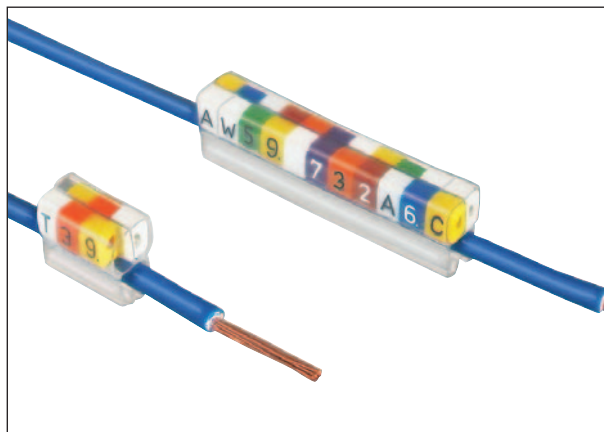



type	article number	Ø wire o.d. mm	for number max. of legends		 pcs
			Type 150	Type 200	
Transparent carriers length 10 mm					
45D-100	0365 0302 000	1,5 - 4,5	2x 3	2x 4	100
80D-100	0365 0303 000	3 - 8	2x 3	2x 4	100
130D-100	0365 0304 000	6 - 13	2x 3	2x 4	100
220D-100	0365 0305 000	10 - 22	2x 3	2x 4	100
Transparent carriers length 18 mm					
45D-180	0365 0312 000	1,5 - 4,5	2x 6	2x 8	100
80D-180	0365 0313 000	3 - 8	2x 6	2x 8	100
130D-180	0365 0314 000	6 - 13	2x 6	2x 8	100
220D-180	0365 0315 000	10 - 22	2x 6	2x 8	100
Transparent carriers length 25 mm					
45D-250	0365 0322 000	1,5 - 4,5	2x 8	2x 11	100
80D-250	0365 0323 000	3 - 8	2x 8	2x 11	100
130D-250	0365 0324 000	6 - 13	2x 8	2x 11	100
220D-250	0365 0325 000	10 - 22	2x 8	2x 11	100
Transparent carriers length 32 mm					
45D-320	0365 0332 000	1,5 - 4,5	2x 10	2x 14	100
80D-320	0365 0333 000	3 - 8	2x 10	2x 14	100
130D-320	0365 0334 000	6 - 13	2x 10	2x 14	100
220D-320	0365 0335 000	10 - 22	2x 10	2x 14	100
300D-320	0365 0336 000	13 - 30	2x 10	2x 14	100





45D-180





80D-180




130D-180



220D-180



300D-320



B5/2-01



B5/2-03



B5/2-04



B5/2-04



Carriers series PR and PRA



PLIOGRAPH^{PLUS}



PR


Material: EVA
Colours: transparent
Operating temperatures: -10 to +65°C
Specification: halogen free



Application: The design of these PR marker holders is such that the marking always remains straight, even if the cable is bent at the exit of the connection.
 They have a ring rib for wires and cables from 1 to 9 mm Ø.



type	artide number	Ø wire o.d. mm	for number max. of legends		length L mm	 pcs
			Type 150	Type 200		
PR 30-17	0373 0910 000	1 - 3	6	8	17	100
PR 30-22	0373 0911 000	1 - 3	7	9	22	100
PR 50-17	0373 0912 000	2 - 5	6	8	17	100
PR 90-17	0373 0913 000	4 - 9	6	8	17	100

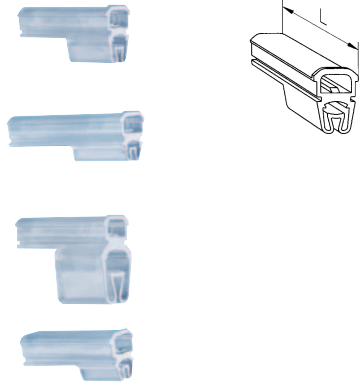


PRA

Material: PVC
Colour: transparent
Operating temperatures: -20 to + 90°C

Application : PRA marker tube for marking large diameter cable bundles and tubes. Fastened with clips less than 7 mm wide.



type	code article	for number max. of legends		Length mm	 pcs
		Type 150	Type 200		
PRA 20-6	0373 0930 000	6	9	20	100
PRA 40-12	0373 0931 000	13	18	40	100

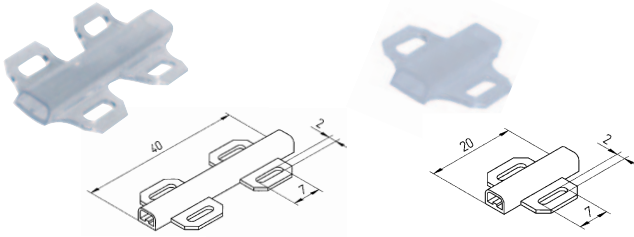

B5/2-01




B5/2-03



B5/2-04



B5/2-04






PRB

Material: PVC
Colour: base: white
holder: transparent
Fixation: double-sided adhesive tape (supplied)
Operating temperatures: -10 to +65°C
Applications: adhesive carriers for marking bollards, conduits, equipment, etc.



type	article number	for number max. of legends		length L mm	 pcs
		Type 150	Type 200		
PRB 10-3	0373 0932 000	3	4	10	100
PRB 18-5	0373 0933 000	6	8	18	100



B5/2-01




B5/2-03



B5/2-04




B5/2-04




PRC

Material: PVC
Colour: base: white
holder: transparent
Operating temperatures: -30 to +70°C
Installation temperatures: > +10°C
Application: PRC carriers have a rigid part for fixing and locking to the cable and a transparent flexible part for inserting the markers.
They are composed of two housings for double marking, before or after connection with a guarantee of hold over time by the locking system.
Available in 2 lengths, they can be used to identify cables from Ø 0.5 to 3.1 mm.

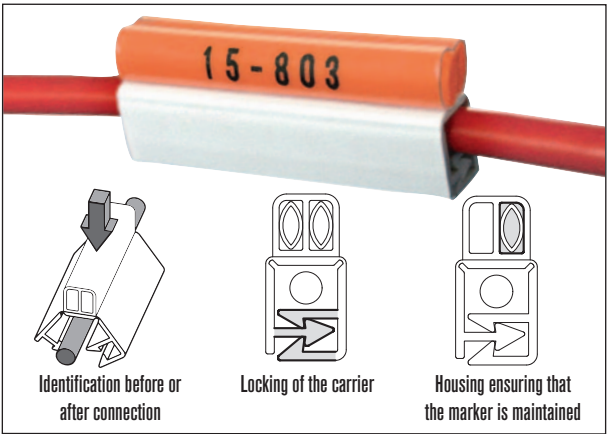


type	article number	Ø wire o.d. mm	length L mm	 pcs
PRC 25	0377 0801 000	0,5 - 3,1	25	100
PRC 32	0377 0802 000		32	100



B13/20-01



B5/2-04



B5/4-01

