



Automotive Parts > Automotive Connectors > Automotive Housings > Timer Connector Housing



Nominal Voltage Architecture: 12 V, 24 V
Connector & Housing Type: **Housing for Female Terminals**
Number of Positions: 15
Sealable: No
Operating Temperature Range: -40 – 130 °C [-40 – 266 °F]

[All Timer Connector Housing \(436\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	No
Primary Locking Feature	Locking Lance
Connector System	Wire-to-Board, Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	15
Number of Rows	2

Electrical Characteristics

Nominal Voltage Architecture	12 V, 24 V
------------------------------	------------



Body Features

Cable Exit Angle	180 °
Primary Product Color	Black
Connector & Keying Code	Neutral

Contact Features

Contact Size	3mm
Contact Type	Receptacle
Mating Tab Width	3 mm[.118 in]
Contact Current Rating (Max)	30 A

Mechanical Attachment

Strain Relief	Add By Accessory
Terminal Position Assurance	No
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA 6.6
Centerline (Pitch)	5 mm[.196 in]

Dimensions

Product Width	22 mm[.866 in]
Row-to-Row Spacing	5 mm[.197 in]
Product Length	47.1 mm[1.854 in]
Connector Height	11.7 mm[.461 in]

Usage Conditions

Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]
Operating Temperature (Max)	130 °C[266 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Method	Bag
------------------	-----



Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





Also in the Series | Junior Power Timer



Automotive Connector Caps & Covers
(12)




Automotive Housings(186)



Automotive Seals & Cavity Plugs(32)



Automotive Terminals(110)

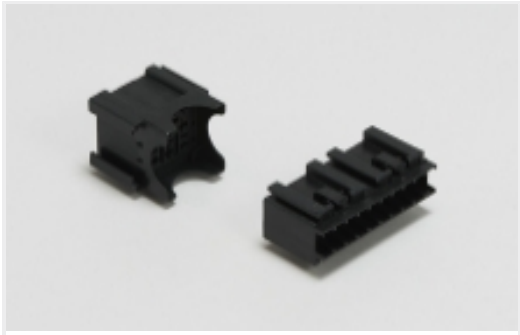


Module Components(1)



Special Purpose Terminals(2)

Also in the Series | Timer Connector System

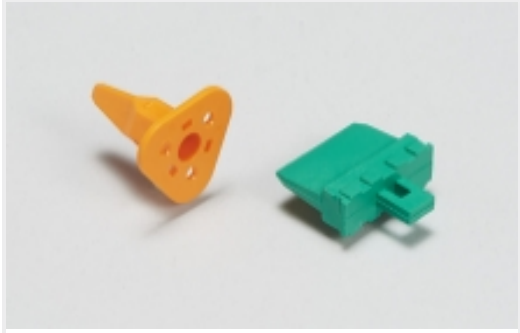

Automotive Connector Locks & Position Assurance(15)




Automotive Housings(186)



Automotive Seals & Cavity Plugs(32)



Automotive Signal & Power Connector Housings(136)

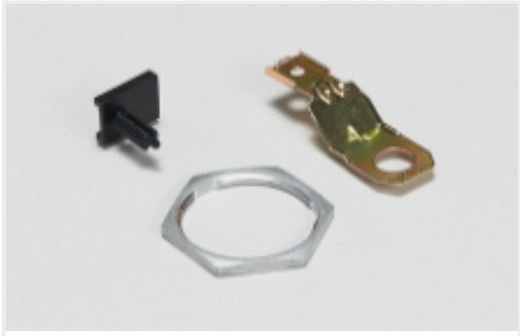

Other Automotive Connector Accessories(1)

Customers Also Bought



TE Part #CAT-D486-CH8172
DEUTSCH DTP Housings

TE Part #173633-2
070 MLC TAB CONT 24-22

TE Part #927777-1
JUNIOR POWER TIMER CONTACT

TE Part #CAT-T4827-T273
TIMER, RECEPTACLE AND TAB

TE Part #967632-1
2. KONT-SICHERUNG 12P

TE Part #8-968972-1
MCP 2.8 GEH 12P

TE Part #1-1418463-9
2POS MQS REC SEALED COD A

TE Part #2-6447232-3
SUPER SEAL 34POS CAP ASSY V AU

Documents

Product Drawings
15P HSG MINI TIMER

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_926171-1_E.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_926171-1_E.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_926171-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
889759_3_Timer_Interconnection_System

English