


HPT




230 VAC



Technical data

Type	HPT	
Housing, Colour	ABS, grey	
Terminal	up to 2,5 mm ²	
Cable entry	7 - 10 mm	
Cable conduit	surface or buried	
Mounting	sound outlet downwards	
Duty cycle factor	100 %	
Protection class	IP 55	
Radio noise suppression	acc. to CENELEC EN 55014	
Temperature range	-20 °C to +50 °C	
Sound pressure	~ 108 dB	
Weight	800 g	



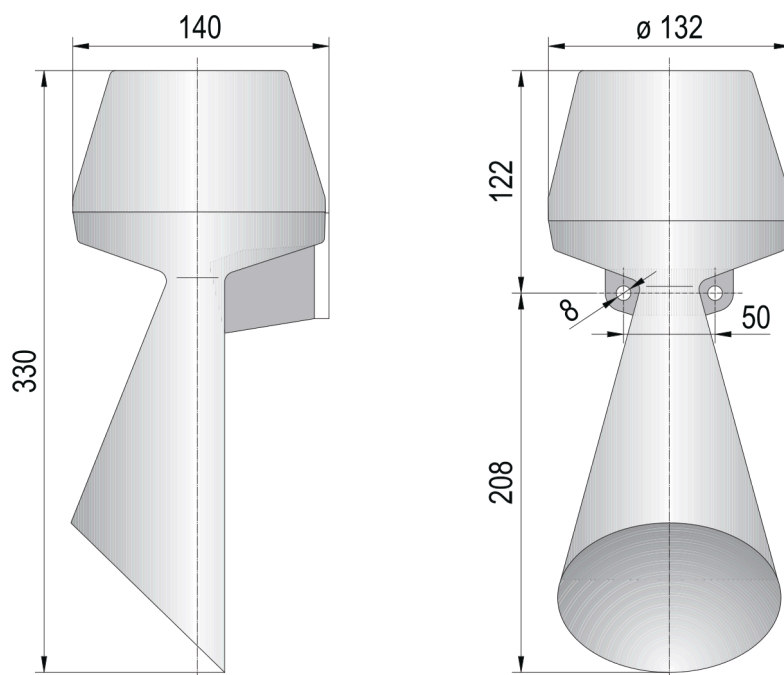

DIREKTRONIK

www.direktronik.se

info@direktronik.se

+46-852400700