


Order Length	Tolerance
$0 \leq L \leq 1M$	+50mm/-0
$1 < L \leq 20M$	+200mm/-0
$L > 20M$	+1%*L/-0



REVISION RECORD				
REV	ECO#	DESCRIPTION	DATE	APPROVED
A0		Initial Release	2024/1/29	leo lai

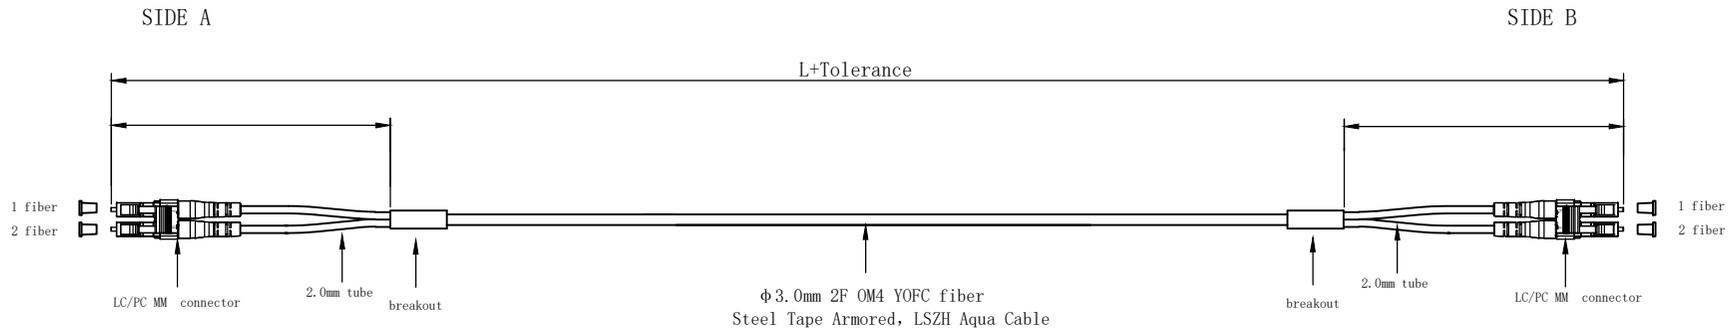

Reference picture



- Requirement:
- 1) Endface standard conform to IEC-61300-3-35;
 - 2) Endface geometry conform to IEC-61755-3-31;
 - 3) Multimode Cable attenuation 3.0dB/km@850nm and 1.0dB/km@1300nm;
 - 4) LC/PC Insert return loss: $IL \leq 0.3dB$, $RL \geq 25dB$ (850nm);
 - 5) Polarity conforms to A-B, B-A;
 - 6) Neutral packing or Customer packaging;
 - 7) The connector graphics in the drawing are only for reference, () Dimensions in brackets are for reference, Exact dimension is subject to the actual product;
 - 8) Materials and finished product comply with RoHS 2011/65/EU.

THIRD ANGLE PROJECTION

TOLERANCE ON DECIMALS

MATERIAL:

UNIT: Metric/mm

