


Pin Assignment

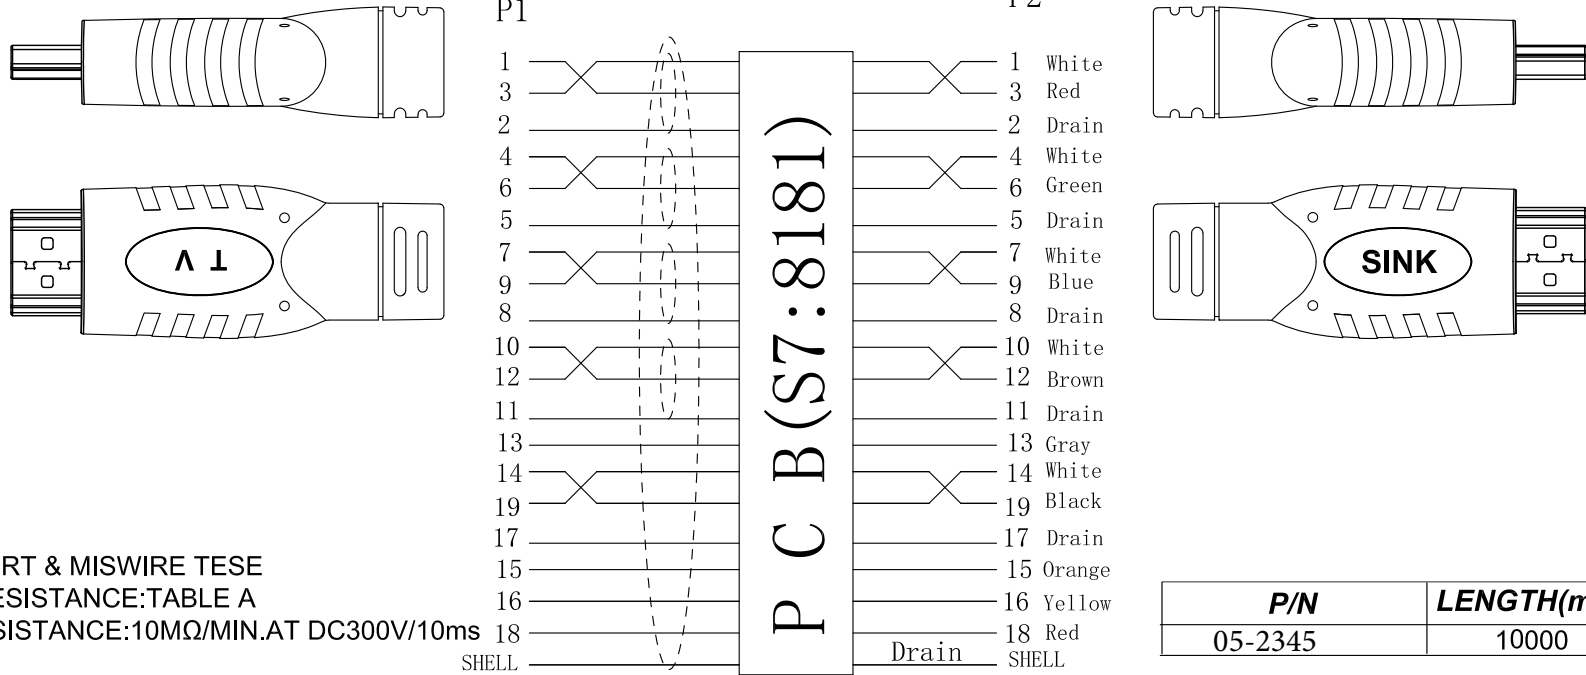

NOTES:

- 100% OPEN, SHORT & MISWIRE TEST
- CONDUCTIVE RESISTANCE: TABLE A
- INSULATION RESISTANCE: 10MΩ/MIN. AT DC300V/10ms
- 4K/60Hz

P/N	LENGTH(mm)	TOLERANCE
05-2345	10000	±150mm

5	OUTER MODEL: PVC MOLDING ,50P COLOR:BLACK		ITEM NO:	HDMI 19M to HDMI 19M CABLE		DRAWER DATE	LY 20180323
4	INNER MODEL: LD-PE COLOR:TRANSPARENT		TITLE			CHECKED DATE	MTC 20180323
3	CONNECTOR: HDMI 19 PIN MALE CONNECTOR, CONTACT GOLD PLATED , SHELL GOLD PLATED , INSULATOR COLOR:BLACK; +IC(S7:8181)		CUSTOMER			APPROVED DATE	
2	CONNECTOR: HDMI 19 PIN MALE CONNECTOR, CONTACT GOLD PLATED , SHELL GOLD PLATED , INSULATOR COLOR:BLACK		MATERIAL	SCALE			
1	CABLE: HDMI 2.0V,(26AWG*1P+D+AL+ML)*5C+28AWG*4C+ADB, PVC JACKET,COLOR:BLACK OD:8.0±0.15MM		REV. A	UNIT	MM		
NO.	SPECIFICATION	Q'TY	DRAWING NO:	80323142			
	BOM LIST		ACAD FILE	E:\			