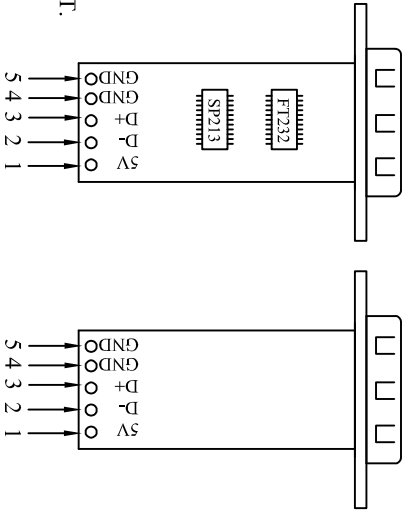
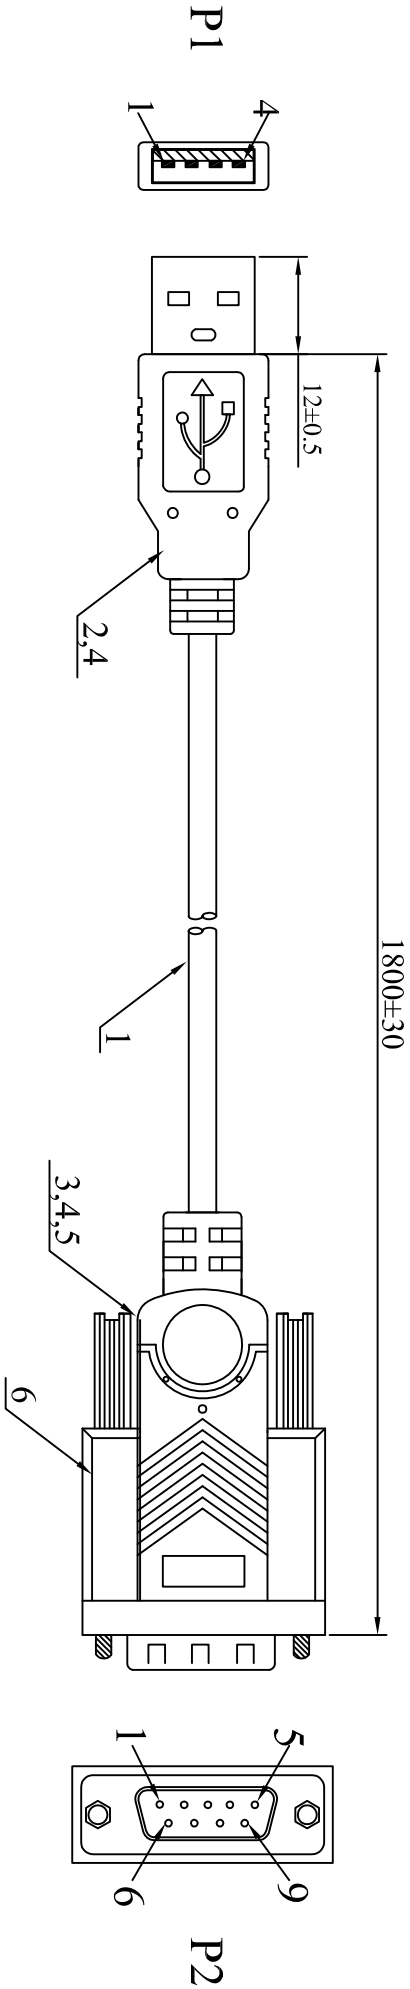


NOTES:  
1.ELECTRICAL TEST:100% OPEN,SHORT&MISSWIRE TEST.  
2.CONDUCTOR RESISTANCE:2ohm,  
INSULATOR RESISTANCE:10M ohm.  
3.HIGH VOLTAGE:DC 300V 0.01sec.  
4.MUST BE ROHS COMPLIANT.

| BOM |       |
|-----|-------|
| 6   | SCREW |

|      |                   |      |
|------|-------------------|------|
| 440# | SCREW COLOR BLACK | 2PCS |
|------|-------------------|------|

|   |         |       |
|---|---------|-------|
| 5 | MOLDING | 15PCS |
|---|---------|-------|

|   |         |        |
|---|---------|--------|
| 4 | MOLDING | 8g/SET |
|---|---------|--------|

|   |           |      |
|---|-----------|------|
| 3 | CONNECTOR | 1PCS |
|---|-----------|------|

|   |           |      |
|---|-----------|------|
| 2 | CONNECTOR | 1PCS |
|---|-----------|------|

|   |       |      |
|---|-------|------|
| 1 | Cable | IPCS |
|---|-------|------|

PIN WIRING

P1

1 \_\_\_\_\_ 1 (5V)

2 \_\_\_\_\_ 2 (D-)

3 \_\_\_\_\_ 3 (D+)

4 \_\_\_\_\_ 4 (GND)

SHELL \_\_\_\_\_ 5 (GND)

| NO. | Name | SPECIFICATION | Q'TY |
|-----|------|---------------|------|
|-----|------|---------------|------|

| TITLE    |     | USB TO DB9P Serial Cable |       |             |            |
|----------|-----|--------------------------|-------|-------------|------------|
| CUSTOMER |     | CUSTOMER'S ITEM          |       |             |            |
| SCALE    | 1:1 | DRAWN BY                 | Peter | DATE        | 2025-04-18 |
| UNIT     | mm  | CHECKED BY               |       | DRAWING NO. |            |
| REV.     | A   | APPROVED BY              |       | PL-XX-0822  |            |