




PDU Technology Specification

Date: 12/15/2022

Customer	Direktronik		RoHS	Yes
Product Name	Designated Power Distribution Unit for Cabinet		Customer's Code	
Part Number	20114050		Picture Code	
No.	Item	Detailed Description		
1	Product Series	AUE2211		
2	Socket Type	Single IEC320 C13 Socket(Right)[21];lec 320 C19 standard, press (right)[6];		
3	Socket Quantity	27		
4	Power Input	Left end single input		
5	Bracket Install	Inverse installation		
6	Cable with plug	IEC60309 plug (16A 3P+N+E)		
7	Control Function	No controlling function		
8	Protection Function	LED digital ammeter [1]; LED display voltage and current		
9	Case	Black		
10	Cable Specification	5 x 2.5 mm ² x 3M		
11	Product Size	L x W x H = 1370 x 56 x 44.4 mm		
12	Mounting Length	1337 mm		
13	Case Length	1272 mm		
14	PDU Exponent	1.475		
15	Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut,		
16	Product Label	Product Name	Designated Power Distribution Unit for Cabinet	
		Specification Model	20114050	
		Rating voltage	Input 380VAC 50/60Hz, output 230V	
		Rating Current	3x 16A	
		Max. Current		
		Max. Power	3x 3680W	
		Safety Authentication	CE	
		Logo	RoHS	
		Producer		
No.	Add-In			
1	Socket assemble	No		
2	Interior Connection Wire	2.5 mm ² (14AWG)		
3	Interior Connection Style	Standard connection		
4	Fix the Cable	Cable clamp(16)		
5	Module Assemble (from left to right)	Pls refer to the drawing		

Preview

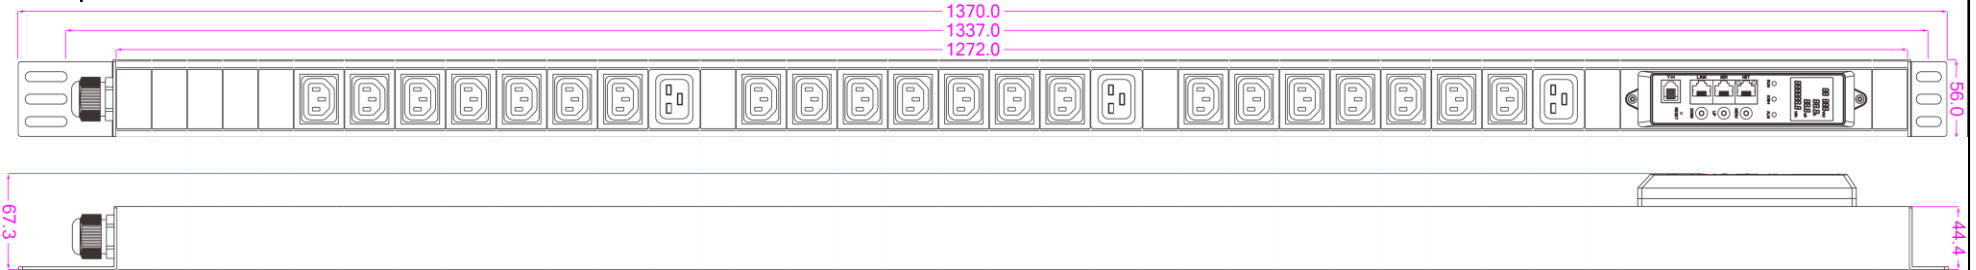

IEC60309 plug (16A 3P+N+E)

DIMENSION AND TOLERANCES (Unit: mm)			Direktronik		
Length:	1370	Mounting length:	1337	Customer	Direktronik
Width:	56	Case length:	1272	Product name	Designated Power Distribution Unit for Cabinet
Height:	44.4	case tolerance:	± 1.0	Part number	20114050
	SIGN	DATE	Customer's code		
DRAWN	Linda	12/15/2022	Drawing number		
CHK'D			Edition number		
APP'D					