
DIREKTRONIK

Direktronik AB tel. 08-52 400 700 www.direktronik.se

11/06/202	20			Dello	NO.: SWDT03120110
omer			RoHS	Yes	
uct Name			Customer's Code		
Part Number 20102102 No. Item		1		Picture Code	SWDT03120110015
lt	em		D	etailed Description	
1 Product Series		AUE2211			
2 Socket Type		Single anti-fall IEC320 C13 Socket[48]; IEC-LOCK sockets			
3 Socket Quantity		48			
4 Power Input		Left end single input			
5 Bracket Install		Inverse installation			
Cable with plug		IEC60309 plug (16A 3P+N+E)			
Control Function		No controlling function			
Protection Function		No protecting function			
Case		Black			
Cable Specification		5 x 2.5 mm² x 2.5M			
Product Size		L x W x H = 1818 x 44.4 x 44.4 mm			
Mounting Length		1791.5 mm			
Case Length		1765 mm			
PDU Exponent		3.041			
15 Fittings		2pcs φ6×16mm cross bolt, 2pcs M6 float nut,			
		Product Name Designated Power Distribution Unit for Cabinet			
		Specification Model 20102102			
		Rating voltage Input 380VAC 50/60Hz, output 230V			
		Rating Current 3x 16A			
Product La	abel	Max. Current			
		Max. Power	3x 3680W		
		Safety Authentication	CE		
		Logo	RoHS		
		Producer			
Δ	dd-In				
Socket assemble No					
Interior Connection Wire		2.5 mm²(14AWG)			
Interior Connection Style		Standard connection			
Fix the Cable		Cable clamp(16)			
5 Module Assemble (from left to right)		Pls refer to the drawing			
Others					
		′s	rs	rs	rs

This technology specification is for: design product for customer and confirm customer's requirements, and is also the basic gist for arranging production.

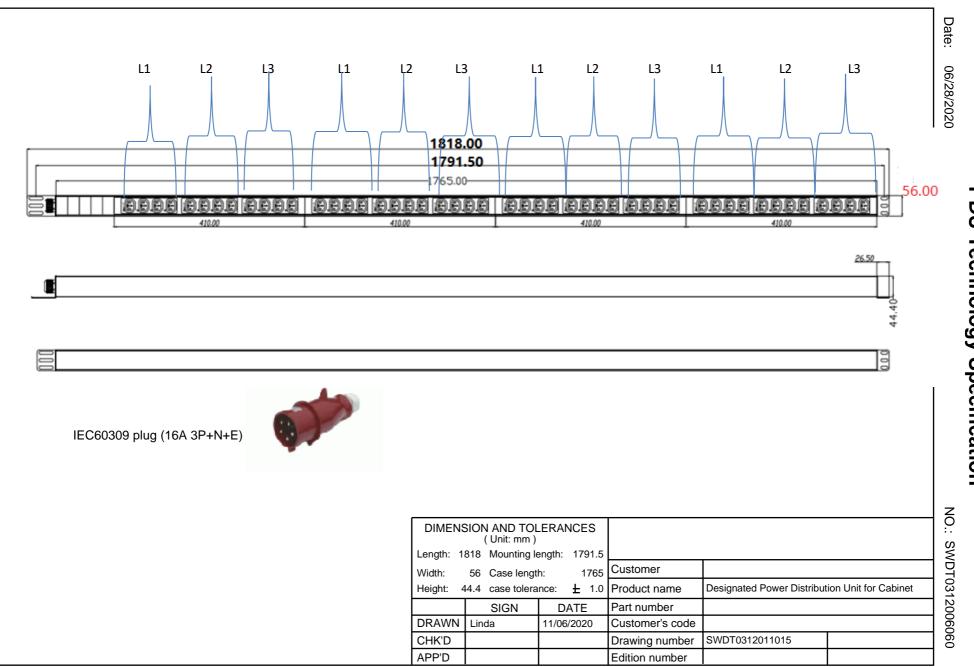

PDU Technology Specification

