
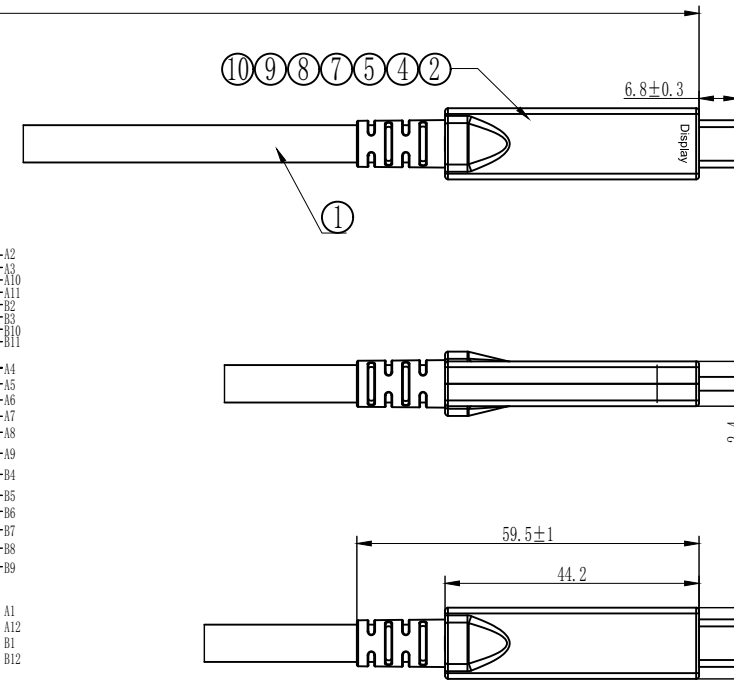
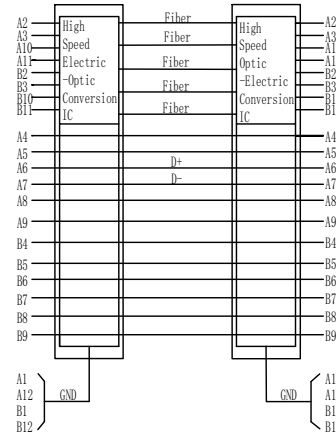
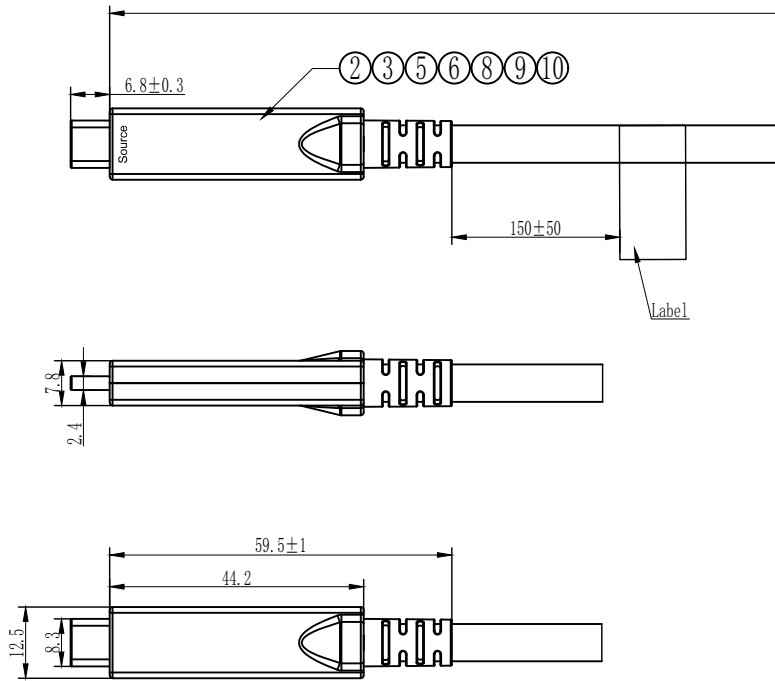



7		8	
REV	DESCRIPTION	SIGNATURE	DATE
AO	ORIGIN	Zhou Hao Yu	2024.04.26

TABLE A



Note:

1. Support 4 Lane DP2.1+USB2.0 & 2 Lane DP1.4+USB3.2
2. Support 4K@60Hz video transmission ;
3. Support 10Gbps Data transmission ;
4. Backwards USB 2.0 & USB 1.1 ;
5. Support PD 60W (20V 3A) Power Delivery

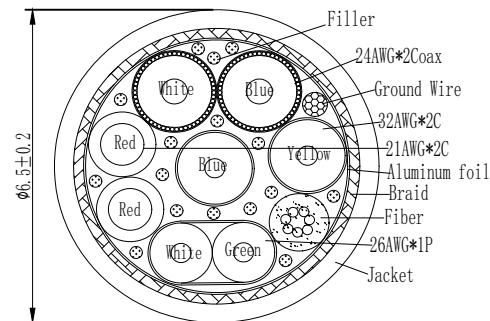


TABLE A

P/N	Model No	Customer P/N:	Length (mm)
	SCFC-3420-005		5000+/-100
	SCFC-3420-010		10000+/-200
	SCFC-3420-015		15000+/-250

10	Screw	4	PCS
9	Clip	2	PCS
8	SR black	2	PCS
7	USB Type C A male shell(Upper)Black(Display)	1	PCS
6	USB Type C A male shell(Bottom)Black(Source)	1	PCS
5	USB Type C A male shell(Bottom)Black	2	PCS
4	USB Type C PCBA (Display)	1	PCS
3	USB Type C PCBA(Source)	1	PCS
2	USB Type C A male nickel plated	2	PCS
1	USB C Active Optical Cable Black TPE OD:6.5±0.2MM	TABLE A	mm
ITEM	SPECIFICATIONS	Q' TY	UNIT

	
TOLERANCES UNLESS OTHERWISE STATED	
X.	± 1
X. X	± 0.25
X. X X	± 0.1
TOOLING	
DECIMALS ANGLES	
X.	$\pm 0.3 \pm 1^\circ$
X. X	$\pm 0.2 \pm 0.5^\circ$
X. XX	$\pm 0.1 \pm 0.5^\circ$

DIREKTRONIK

TYPE: Full-featured Type C ACTIVE OPTICAL CABLE		
DRAW:	PART NO: SCFC-3420-XXX-S108M	
CKD:	CUSTOMER:	UNIT:mm
APP:	DWG NO:	REV:A0
SHEET:1/1		DATE:2024.04.26