





Electrical properties:

- 1.1 Tested by Quantum data 980 handheld
test instrument for DP1.4 (32.4G)
Support 7680*4320 30Hz 4:4:4
Support 7680*4320 60Hz 4:2:0 or DSC
- 1.2 Tested by PC,3840*2160 120Hz 4:4:4 8bit HDR OFF
Tested by PC,3840*2160 120Hz 4:2:2 12bit HDR ON
Tested by PC,3840*2160 60Hz 4:4:4 12bit HDR ON
Tested by PC,720P,1080P
- ROHS 2.0 and REACH compliant.

MATERIAL LIST

⑧	PACKAGE	PE BAG	1
⑦	PRINTING	High Speed Cable 20276 80 C 30V VW-1	
⑥	CABLE	(1/0.254BC*1P+1/0.254BC+AM)*5C+1/0.254BC*4C+AM+1/0.254BC+128/0.12ALMG+PVC, OD: 6.0±0.2MM, COLOR: BLACK	L
⑤	MOLD HOOD	PVC, COLOR: BLACK	1
④	CONNECTOR	DP1.4 MALE, NO HOOK, RUBBER CORE: RED, GOLD PLATED PIN & SHELL	1
③	MOLD HOOD	ABS, COLOR: BLACK	1
②	INNER MOLD	LD-PE, COLOR: TRANSPARENT	1
①	CONNECTOR	DP1.4 MALE, WITH HOOK, RUBBER CORE: RED, GOLD PLATED PIN & SHELL	1
No.	PART NAME	DESCRIPTION	QTY

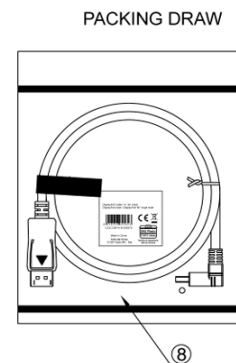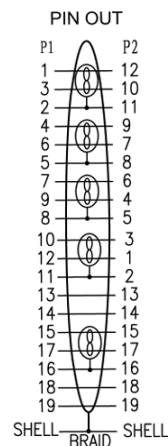

DRAW No.		NAME	DP 1.4 CABLE 4K*2K 120HZ		
CUSTOMER			MAPE	TOLERANCE	
MODEL No.				X.X ±1.00 X.X ±0.50	
APPROVE BY		CHECK BY	DRAW BY	SCALE	MM
				PAGE	1/1