

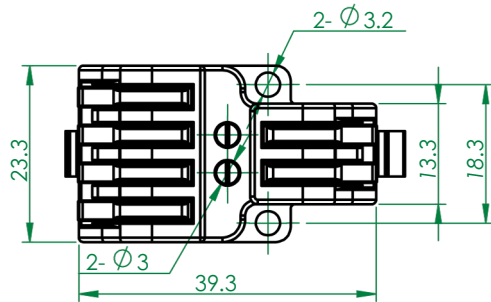
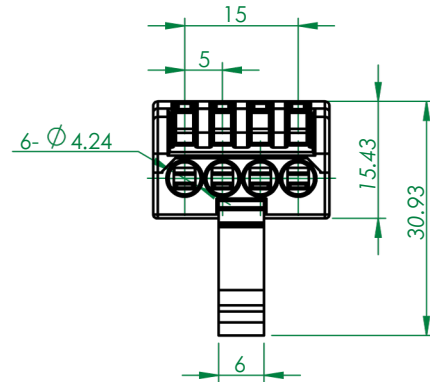


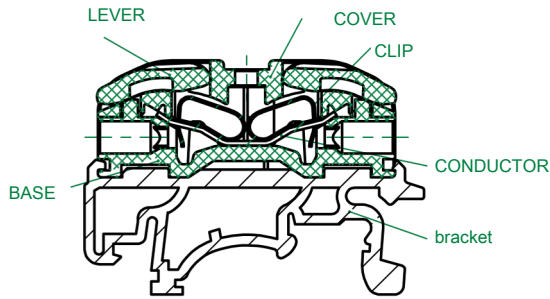

SPECIFICATIGNS

(Applicable wires) :

Solid wire 0.5-4mm²
Fine wire 0.5-2.5mm²

■ Temperature range : -40°C+105°C

■ Voltage rating : 400V

■ Current rating : 32A

■ (Contact resistance ≤ 0.015 Ω

■ Insulation resistance : ≥ 1000MΩ

■ Material:

Plastic parts : PC UL94V 2 (0)

Conductor material : copper

Clip : 301(Stainless steel 301)