

# DIREKTRONIK

## CompactTracker

COMPACT BATTERY GPS TRACKING DEVICE FOR LONG-TERM MONITORING WITH USB-C CONNECTION

### USAGE AND CHARACTERISTICS

- » For tracking and security of motorcycles, vehicles, parcels, luggage etc.
- » Location and tracking at preselected time interval
- » Monitoring of temperature, vibration and tilt
- » G-shock warning
- » Compact design and dimensions
- » USB-C connector
- » Battery life up to 12 months



### MEASURES AND TRANSMITS

- » GPS & GSM positioning
- » Speed and direction of movement
- » G-shock detection
- » Temperature
- » Altitude
- » Tilting – motorcycle or bike falling detection
- » Battery voltage and status
- » Driver behaviour evaluation

### CURRENTLY AVAILABLE\*

TYPE	GSM	GPS	BATTERY	CHARGING
CT 100 201	2G	✓	3 400 mAh	USB-C
CT 100 001	2G/4G NB-IoT/Cat M1	✓	3 400 mAh	USB-C



\*for customized solutions please feel free to contact us

# CompactTracker

## TECHNICAL PARAMETERS

<b>GSM</b>	Version 2G	850/900/1800/1900 MHz
	Version 4G NB-IoT	B1@2100MHz, B3@1800MHz, B8@900MHz, B5@850MHz, B20@800MHz, B28@700 MHz
	Version 4G LTE NB-IoT EGPRS	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28/B39 - for Cat M1 only @LTE 850/900/1800/1900 @EGPRS
	SIM	Nano SIM, Plug-in 1.8 V
	Types of communication	Calling, SMS, GPRS
	Calls	Alarm call
	SMS	Alarm&Info SMS; SMS commands, requests, SMS configuration
	GPRS internet connectivity	Class 12/static & dynamic IP VPN, UDP protocol / 128bit security encryption key / FW upgrade, configuration settings, on-line value reading, report memory reading
<b>GNSS</b>	GPS and Glonass	66 satellites
<b>ANTENNAS</b>	GPS, GSM	Internal
<b>BATTERIES</b>	Type and Capacity	Li-Ion 3 400 mAh rechargeable
<b>CONSUMPTION</b>	Sleep mode	5 mAh a day
	Sending of GPS position to server	1,5 mAh single shot
<b>CONNECTION</b>	USB-C	Charging / report memory reading / configuration / FW upgrade
<b>SENSORS</b>	3 dimensions G sensor	Movement detection / tilt detection / G-shock detection
	Other sensors	Temperature
<b>INTERNAL MEMORY</b>	Flash 512 kB	Capacity 5 000 events or GPS positions
<b>DIMENSIONS</b>	Plastic box	50 x 90 x 20 mm
<b>TEMPERATURE RANGE</b>	Li-Ion rechargeable batteries	-20 °C up to +65 °C, charging +5 °C up to +35 °C
<b>PROTECTION CLASS</b>	IP30	
<b>WEIGHT</b>	130 g	
<b>STANDARDS</b>	EMC	EN 50121-3-2 ed.4   EN 61000-6-4:2007+A1:2011   EN 55032:2015   EN 55024:2010
	LVD	EN 62368-1:2014+A11:2017

## BATTERY LIFE

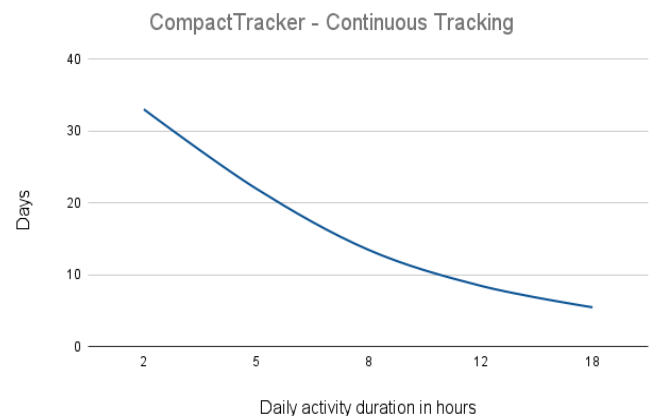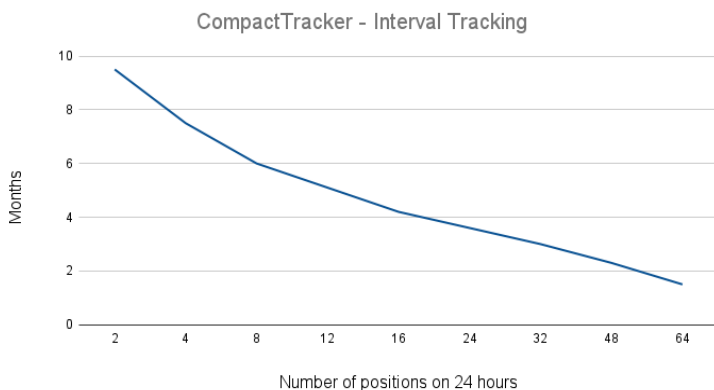

Expected conditions: > GPS and GSM signals have no significant obstacles  
> Temperature in range from 15°C up to 25°C

**LEVEL**  
SYSTEMS

Plhovska 1997, 547 01  
Nachod, Czech republic

tel: +420 491 446 611  
fax: +420 491 446 644  
email: level@level.systems

Data Box ID: tsjdcq  
IČ: 474 69 374  
DIČ: CZ 474 69 374

**www.level.systems**  
C 2701 District court  
Hradec Kralove

