

# Dataprodukter utöver det vanliga

ZEEVEE

Best.nr: 20102706



Quad-Channel H.264 HD Encoder

Designed to encode and deliver H.264 video up to 1080p, the ZyPerMX4 allows organizations to deliver content over any IP network. With four encoders in a single appliance, IT/ AV managers can deliver more content while utilizing fewer network resources.

## Flexible HD Encoding

ZyPerMX4 delivers compressed 720p and 1080p HD resolution content directly over a standard Ethernet network.

### **Multiple Transport and Playback Options**

Receive content on a wide variety of devices, including televisions/displays, computers, and smart devices via unicast, multicast (UDP/RTP), RTMP or HLS.

# **Effortless Deployment**

The ZyPerMX4 supports power over Ethernet (POE) reducing the need for power supplies — all you need is an Ethernet switch that supports POE. Management is also a snap via web-based administration — providing full access to configuration parameters, control, and advanced features. Streams from the ZyPerMX4 are also autodiscovered by the ZvMXE+ set-top-box.



# Highlights:

- 4 HDMI inputs
- H.264/MPEG-4 AVC, RTMP and HLS encoding
- Supports up to 1080p
- Linear PCM input, MP2 or AC3 audio output
- Built-in web server for control and configuration
- Power over Ethernet (PoE) support


### Models:

### ZMXENC4-4

Includes up to 4 HLS streams per HDMI Input.

### ZMXENC4-100

Includes up to 100 HLS streams per HDMI Input

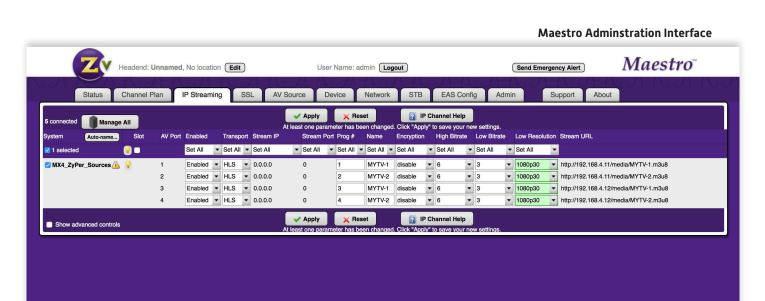

Input				
Video	Connector		4 x HDMI Type A, female	
Audio Formats	Linear PCM			
Closed Caption Audio			4 x 3.5mm jack	
Output				
LAN	Connector		1 x RJ-45 (PoE), shielded	
Audio Formats	MP2, AC3, AAC			
Format				
HDMI Input: 640 x 480p, 720 x 480i/p, 720x576i/p, 1280 x	Input: 480p, 720 x 480i/p, 720x576i/p, 1280 x 720p, 1920 x 1080i/p		Streaming Output: 720 x 480p, 1280 x 720p or 1920 x 1080p	
Other Specifications				
Video Encoding (output)	H.264/MPEG-4 AVC, RTMP, HLS			
Audio Encoding (output)	MP2, AC3, AAC			
Output Bit Rate	Selectable from 1 Mbps - 10 Mbps			
Power input (locking connector)	12 VDC 1A (Worldwide AC adapter is supplied)			
Dimensions (L x W x H)	7.09 in (180 mm) x 4.41 in (112 mm) x 1.34 in (34 mm)			
Temperature	Operating temperature: 32 to 104 °F (0 to +40 °C) Storage temperature: -4 to +176 °F (-20 to +80 °C)			
Humidity	Operating/ Storage humidity: 20% to 90% (non-condensing)			

#### ZyPerMX4 Front View



ZyPerMX4 Rear View



ZeeVee, Inc.,headquartered in Littleton, Mass., and founded in 2007, is a leading global developer of digital technology and products for distributing audio-video content from any source or multiple sources to any number of displays. Manufactured in the U.S. and used primarily in commercial and corporate applications, ZeeVee products are employed worldwide by major organizations in education, government, hospitality, retail, sports, entertainment, broadcasting, healthcare, housing, energy and other industries.

