DIREKTRONIK
Dataprodukter utöver det vanliga

MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
1					

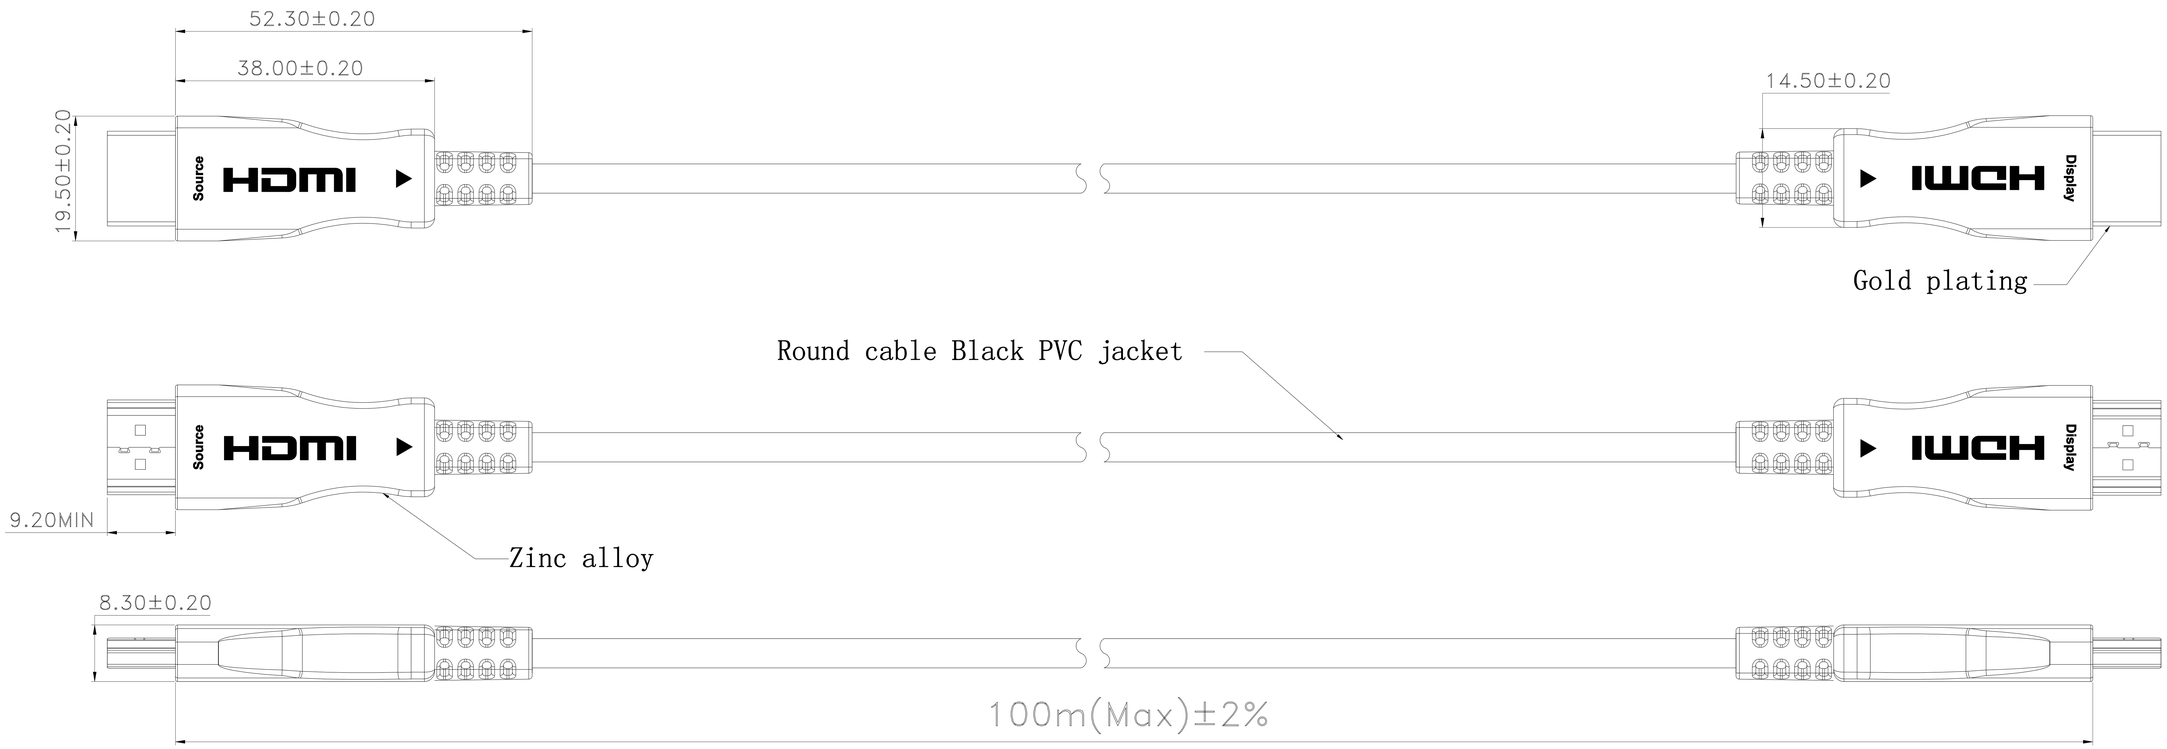

NOTE:

- Supports computer resolutions to 4K@60Hz@4:4:4
- Plug and Play
- Compatible with HDMI 2.0 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications:For Indoor use only;
- Operating temperature:-40℃ to 70℃
- Minimum bending radius 20mm
- Max.tension force:100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber(high speed data)and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing:package 1pc reel

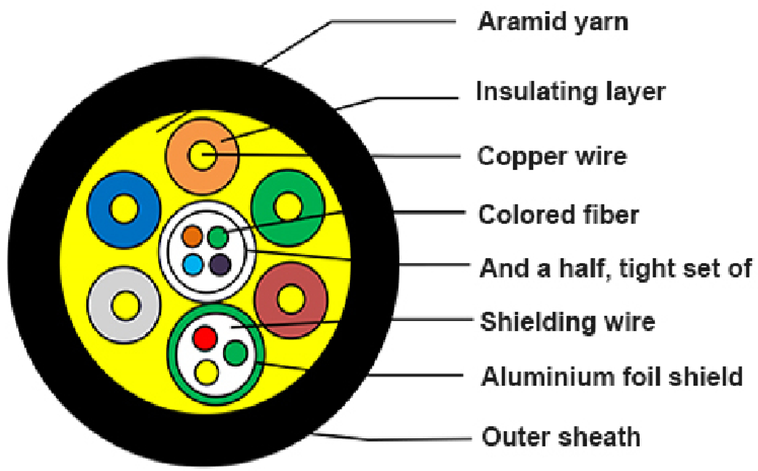

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.10
.XX	±2.0°	.XX	±0.05
.XXX	±1.0°	.XXX	±0.03

图 号		日 期
制 图	CLH	2022.07.05
审 核		
核 准		

DIREKTRONIK
Direktronik AB tel. 08-52 400 700 www.direktronik.se