



MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
△					

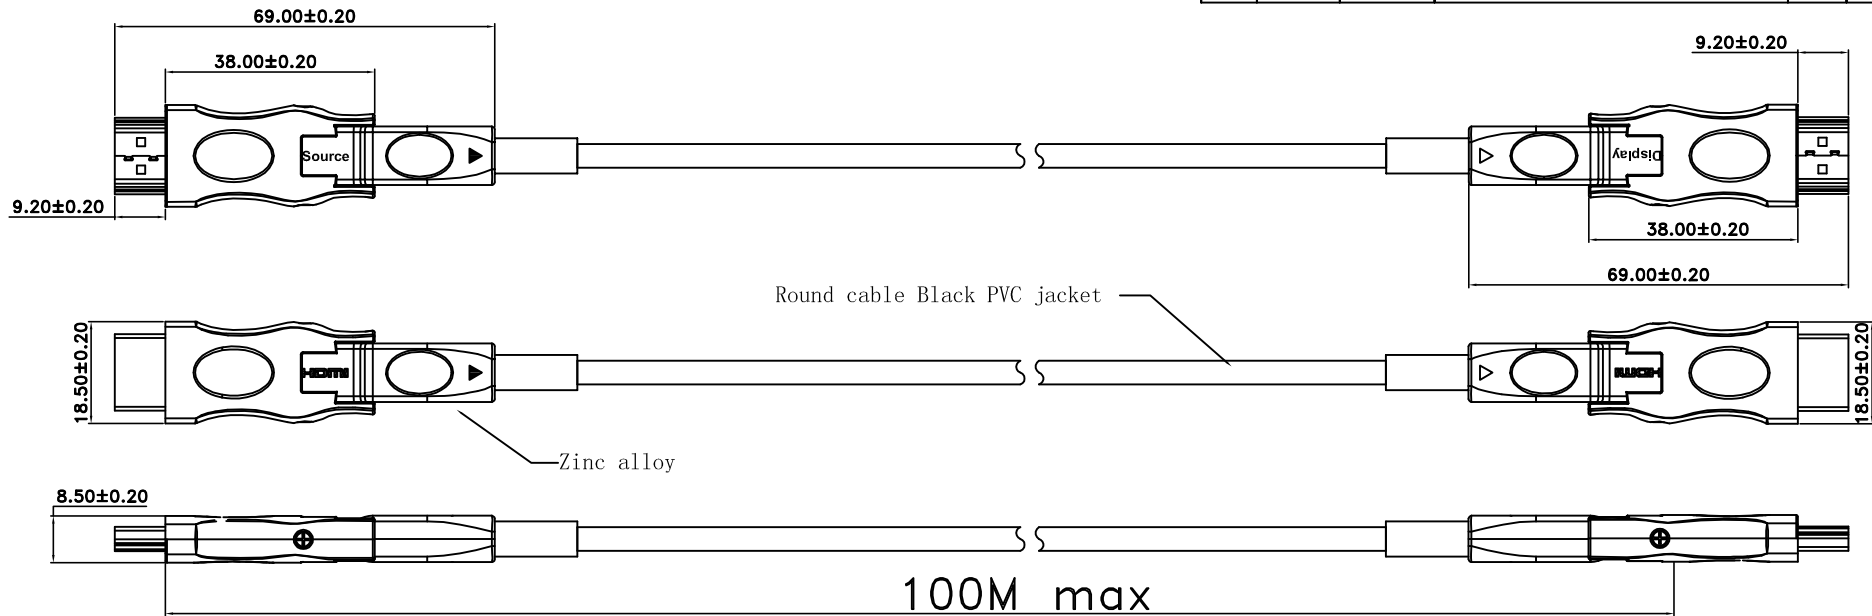

NOTE:

- Supports computer resolutions to 4K@60Hz@4:4:4
- Plug and Play
- Compatible with HDMI 2.0 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

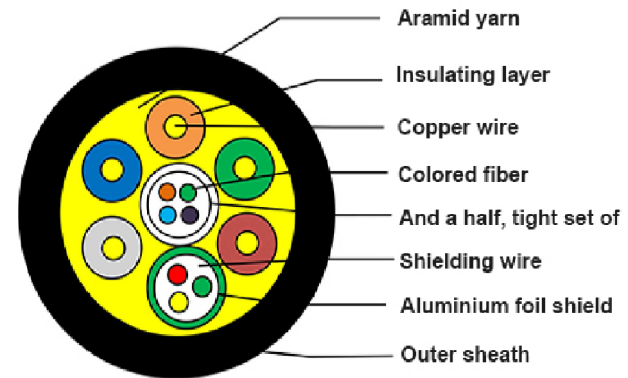

DIREKTRONIK

Dataprodukter utöver det vanliga

UNLESS OTHERWISE SPECIFIED TOLERANCE				图号	日期					
ANG	TOL	DIM	TOL	制图	CLH	2020.09.24				
.X	±3.0°	.X	±0.10	审核						
.XX	±2.0°	.XX	±0.05	核准						
XXX	±1.0°	XXX	±0.03				单位	比例	页码	版本
							mm	1:1	1/1	1