
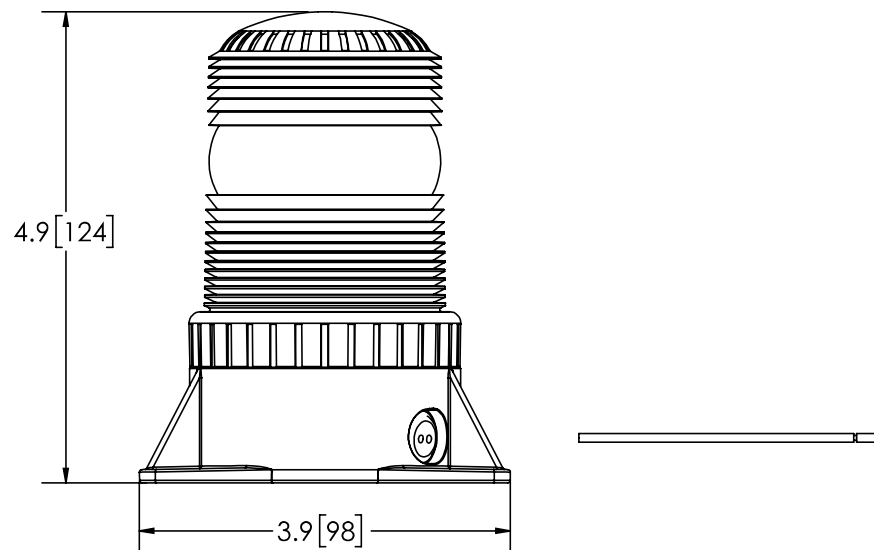


| REVISION HISTORY |                    |            |
|------------------|--------------------|------------|
| REV.             | DESCRIPTION        | DATE       |
| D                | REVISE PER EC3718  | 2015-06-26 |
| E                | REVISE PER EC3718  | 2018-04-10 |
| F                | REVISED PER EP0002 | 2018-04-10 |


## SPECIFICATIONS

- CERTIFICATIONS: **CE**; **UL**; ECE R10; SAE SEE CHART ;  ; IP-66D/IP-67D for a Category 2, Versatile enclosure  
Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: PULSE8 : 80 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-80 VDC
- VOLTAGE (EXTREME): 9-94 VDC
- CURRENT (PEAK): 0.12A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 1.5W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 2-16 AWG LEAD WIRES
- MOUNTING: 2 BOLT
- BASE MATERIAL: GF POLYPROPYLENE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.62 LBS (0.28 Kg)

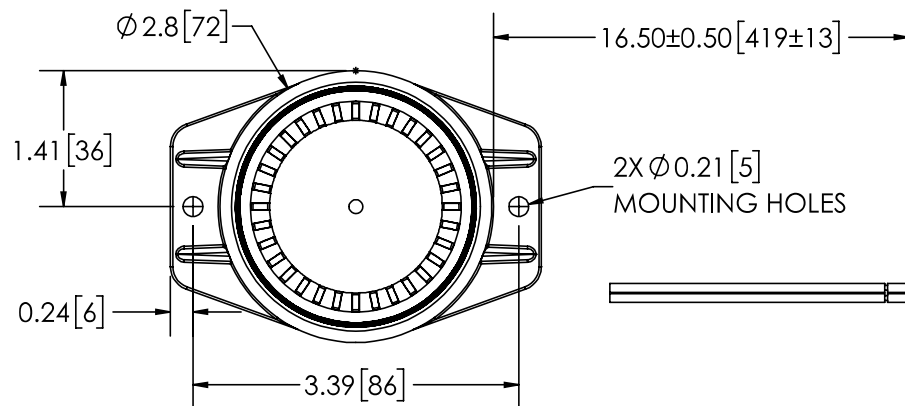

| FG PRODUCT CHART |       |                   |
|------------------|-------|-------------------|
| FG P/N           | COLOR | SAE J845 JUN 2013 |
| 6262A            | AMBER | CLASS 3           |
| 6262B            | BLUE  | N/A               |
| 6262C            | CLEAR | CLASS 3           |
| 6262G            | GREEN | N/A               |
| 6262R            | RED   | CLASS 3           |

- NOTES:
- ROHS COMPLIANT
  - DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

|                                                                                      |                        |                  |                                           |            |
|--------------------------------------------------------------------------------------|------------------------|------------------|-------------------------------------------|------------|
| SCALE 1:2                                                                            |                        |                  | APPROVALS                                 | DATE       |
| CAD GENERATED DRAWING<br>DO NOT MANUALLY UPDATE.<br>MODEL REFERENCED: C              |                        |                  | Dr. Annie Braithwaite                     | 2018-04-10 |
|                                                                                      |                        |                  | CHECKED ABB                               |            |
| TOLERANCES ARE IN INCHES, AND MILLIMETERS<br>TOLERANCES UNLESS OTHERWISE STATED ARE: |                        |                  | MECH. ENG. JLA                            |            |
| <u>MILLIMETERS DECIMALS</u>                                                          | <u>INCHES DECIMALS</u> | <u>ANGLES</u>    | ELEC. ENG. GCJ                            |            |
| XX ± 1.0mm                                                                           | X.X ± 0.1              | ± 0.5°           | TEST ENG. JRT                             |            |
| XX.X ± 0.5mm                                                                         | X.XX ± 0.04            | <u>FRACTIONS</u> |                                           |            |
|                                                                                      | X.XXX ± 0.02           | ± 1/64           | SALES. ARS                                |            |
| THIRD ANGLE PROJECTION                                                               |                        |                  |                                           |            |
|  |                        |                  | Electronically Controlled Use Latest Copy |            |


**ECCO**
[www.eccolink.com](http://www.eccolink.com)

Americas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

### LED BEACON, 360°, 12-80VDC

|                                       |                                |
|---------------------------------------|--------------------------------|
| CUSTOMER PART NO.<br><b>SEE CHART</b> | PRODUCT SERIES:<br><b>6200</b> |
| SIZE: <b>A</b>                        | DWG. NO. <b>6262X</b>          |
| SHEET 1 OF 1                          | Project: P12001                |
| Date Created: 2013-01-03              | REV. <b>F</b>                  |

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ELECTRONIC CONTROLS CO. AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ELECTRONIC CONTROLS CO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2013 ELECTRONIC CONTROLS CO.