

NR300 Router Quick Start Guide

Welcome to your Navigateworx product

This guide helps you with initial product setup.




Verify your components

If any of the below items is missing or damaged, please contact your sales representative.

a. Included equipment



Navigateworx Router

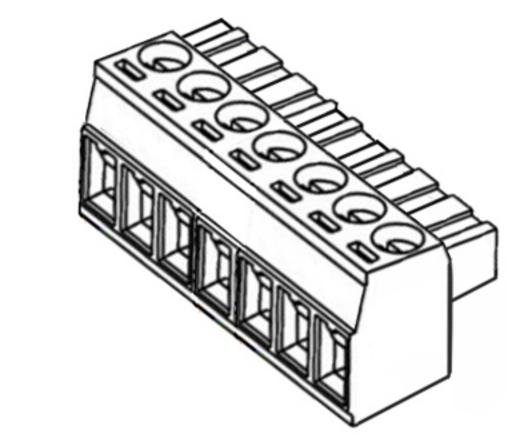


Terminal block for power input & serial port



Ethernet cable


b. Optional accessories

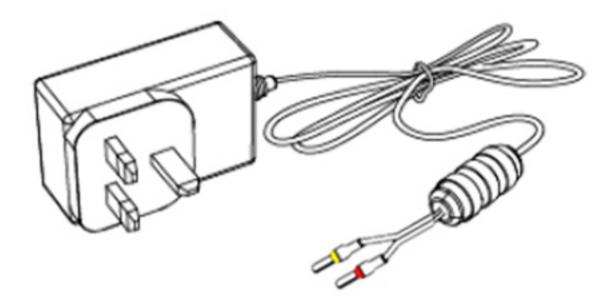


Power adapter



Cellular antenna(x2)

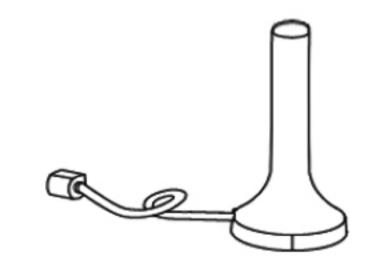


Cellular antenan(x2)

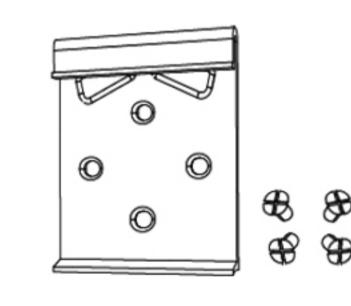


DIN rail mounting kit


c. Required tools and equipment

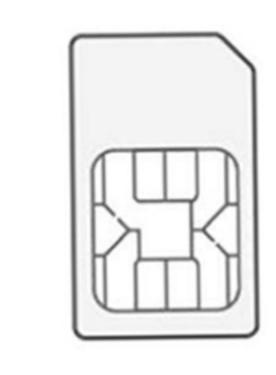

SIM Card

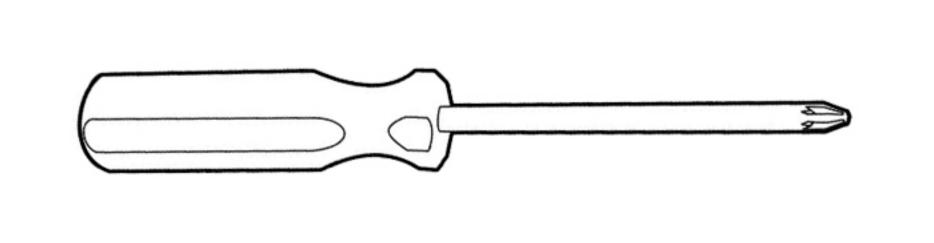


Phillips-head screwdriver

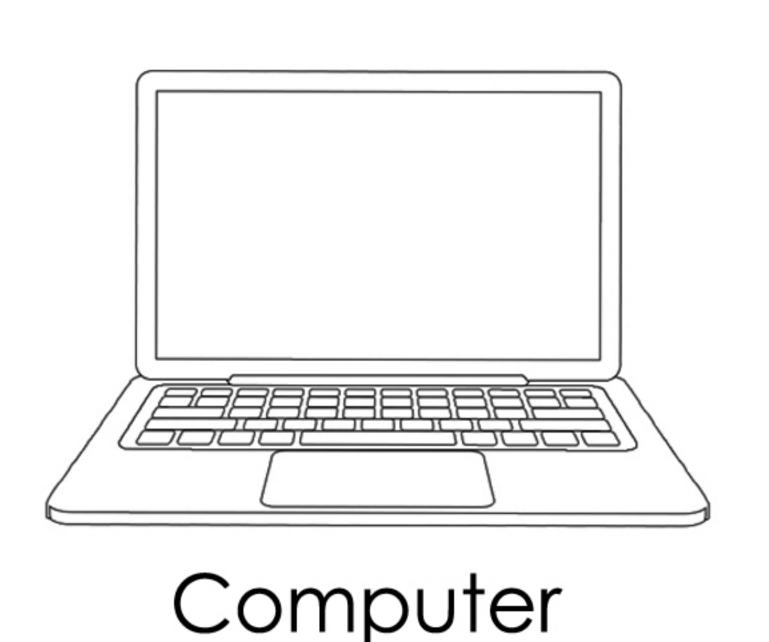




Hardware Prepare

a. Install SIM Card

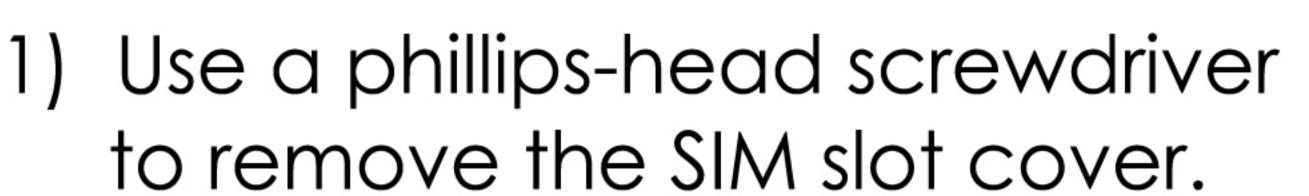


- 2) Insert the SIM card(s) into the SIM sockets.
- 3) Replace the SIM slot cover.

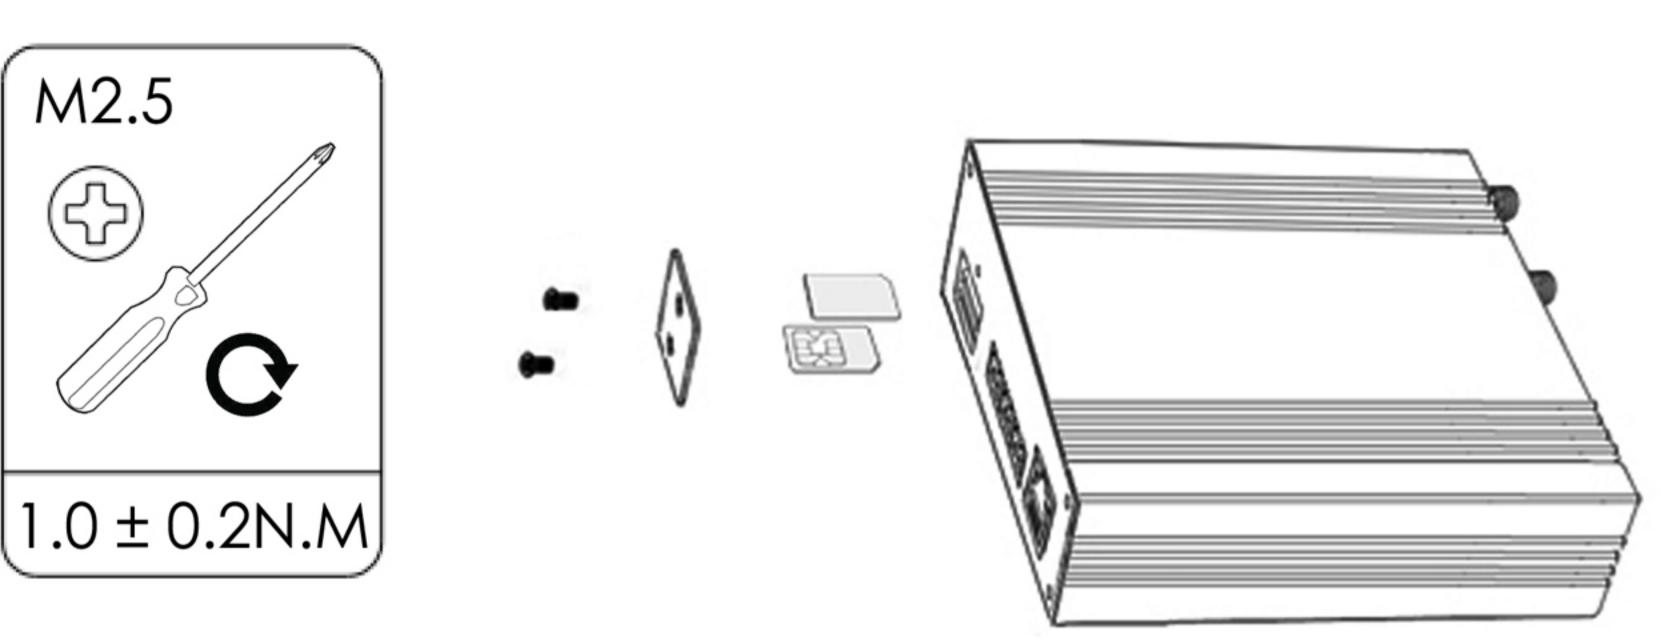


b. Install power terminal block


- 1) Remove the pluggable connector from the unit, then loosen the screws for the locking flanges as needed.
- 2) Connect the wires of the power supply to the terminals.

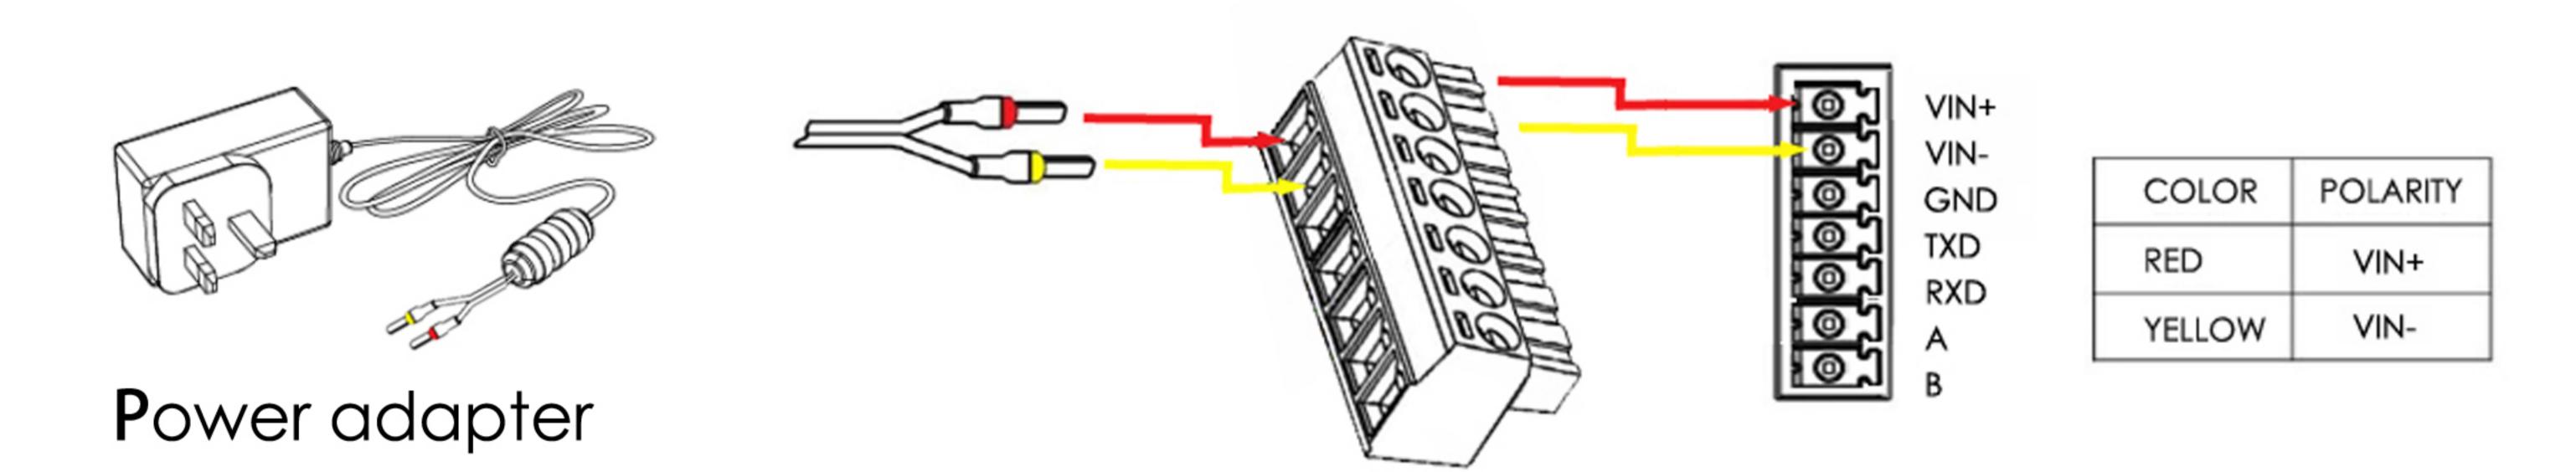

c. Install cellular antenna

1) Connect the cellular antenna to the MAIN and AUX connector on the unit.

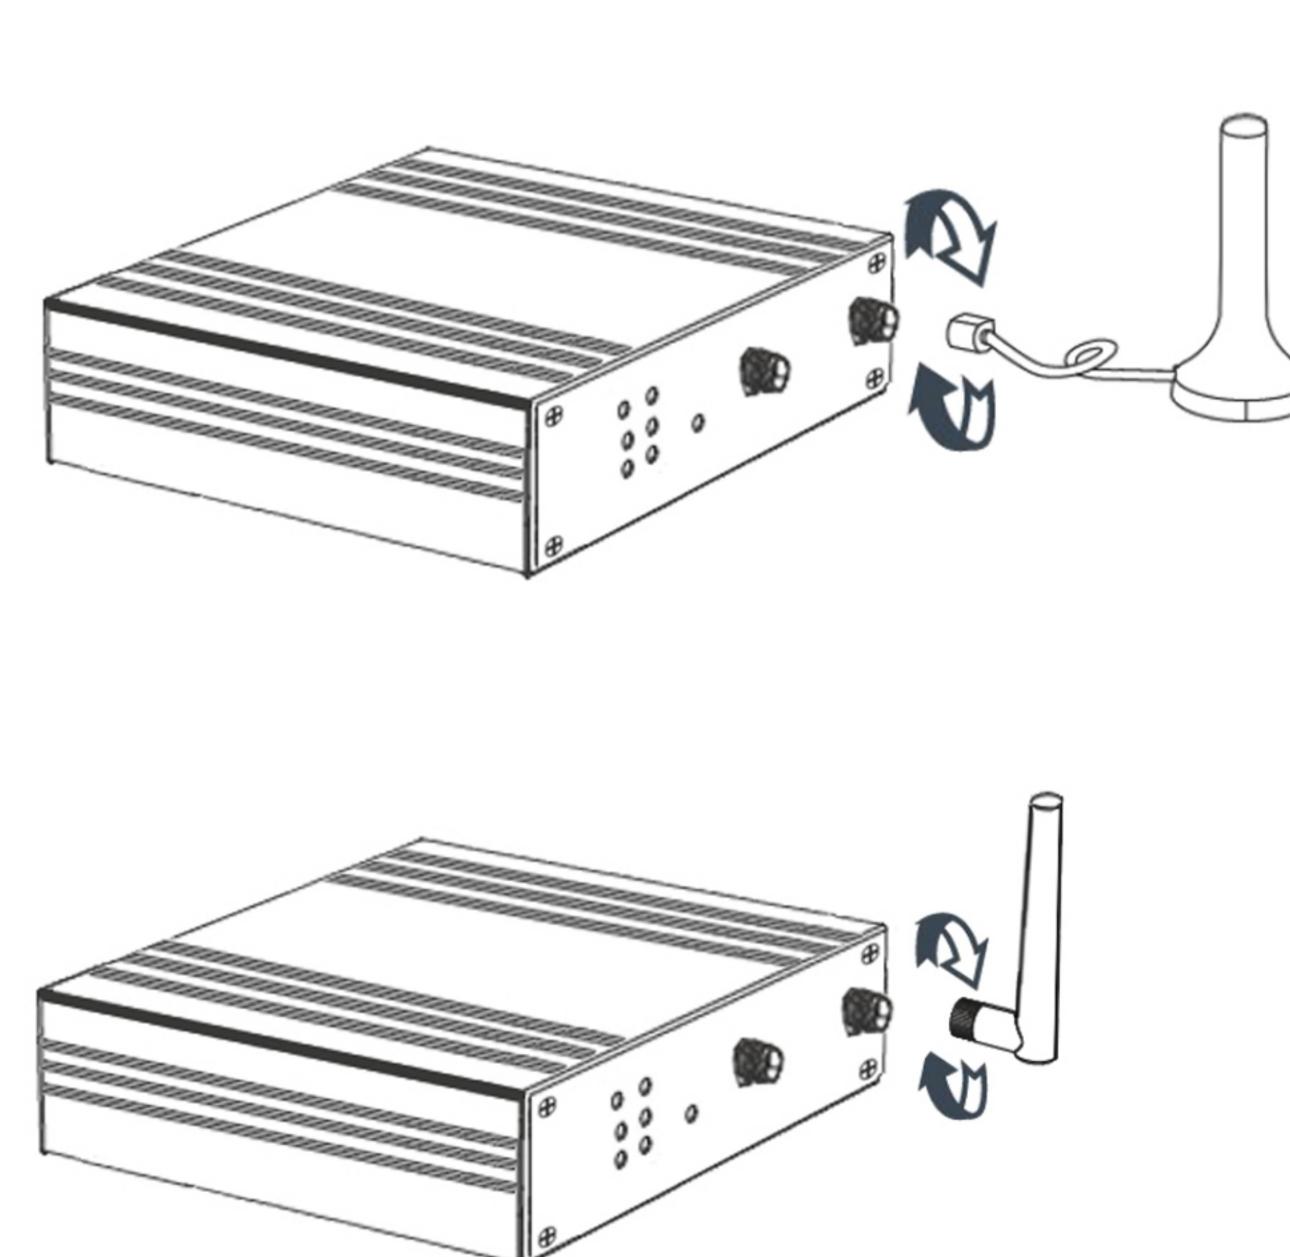

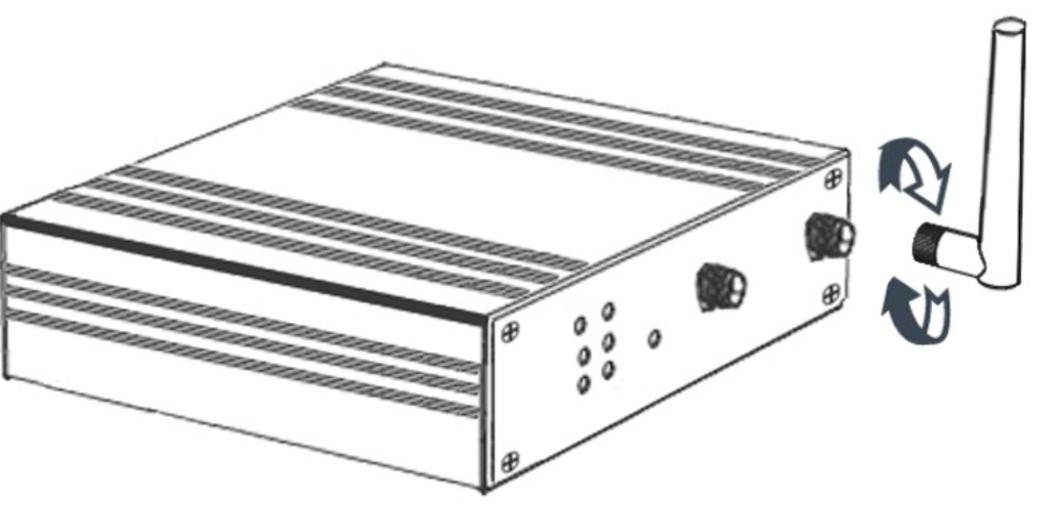




Power on the router

a. Power the router


- 1) Connect one end of the Ethernet cable to the LAN port on the unit and the other end to a LAN port on a PC.
- 2) Connect the AC power to a power source.
- 3) Router is ready when SYS LED is blinking.

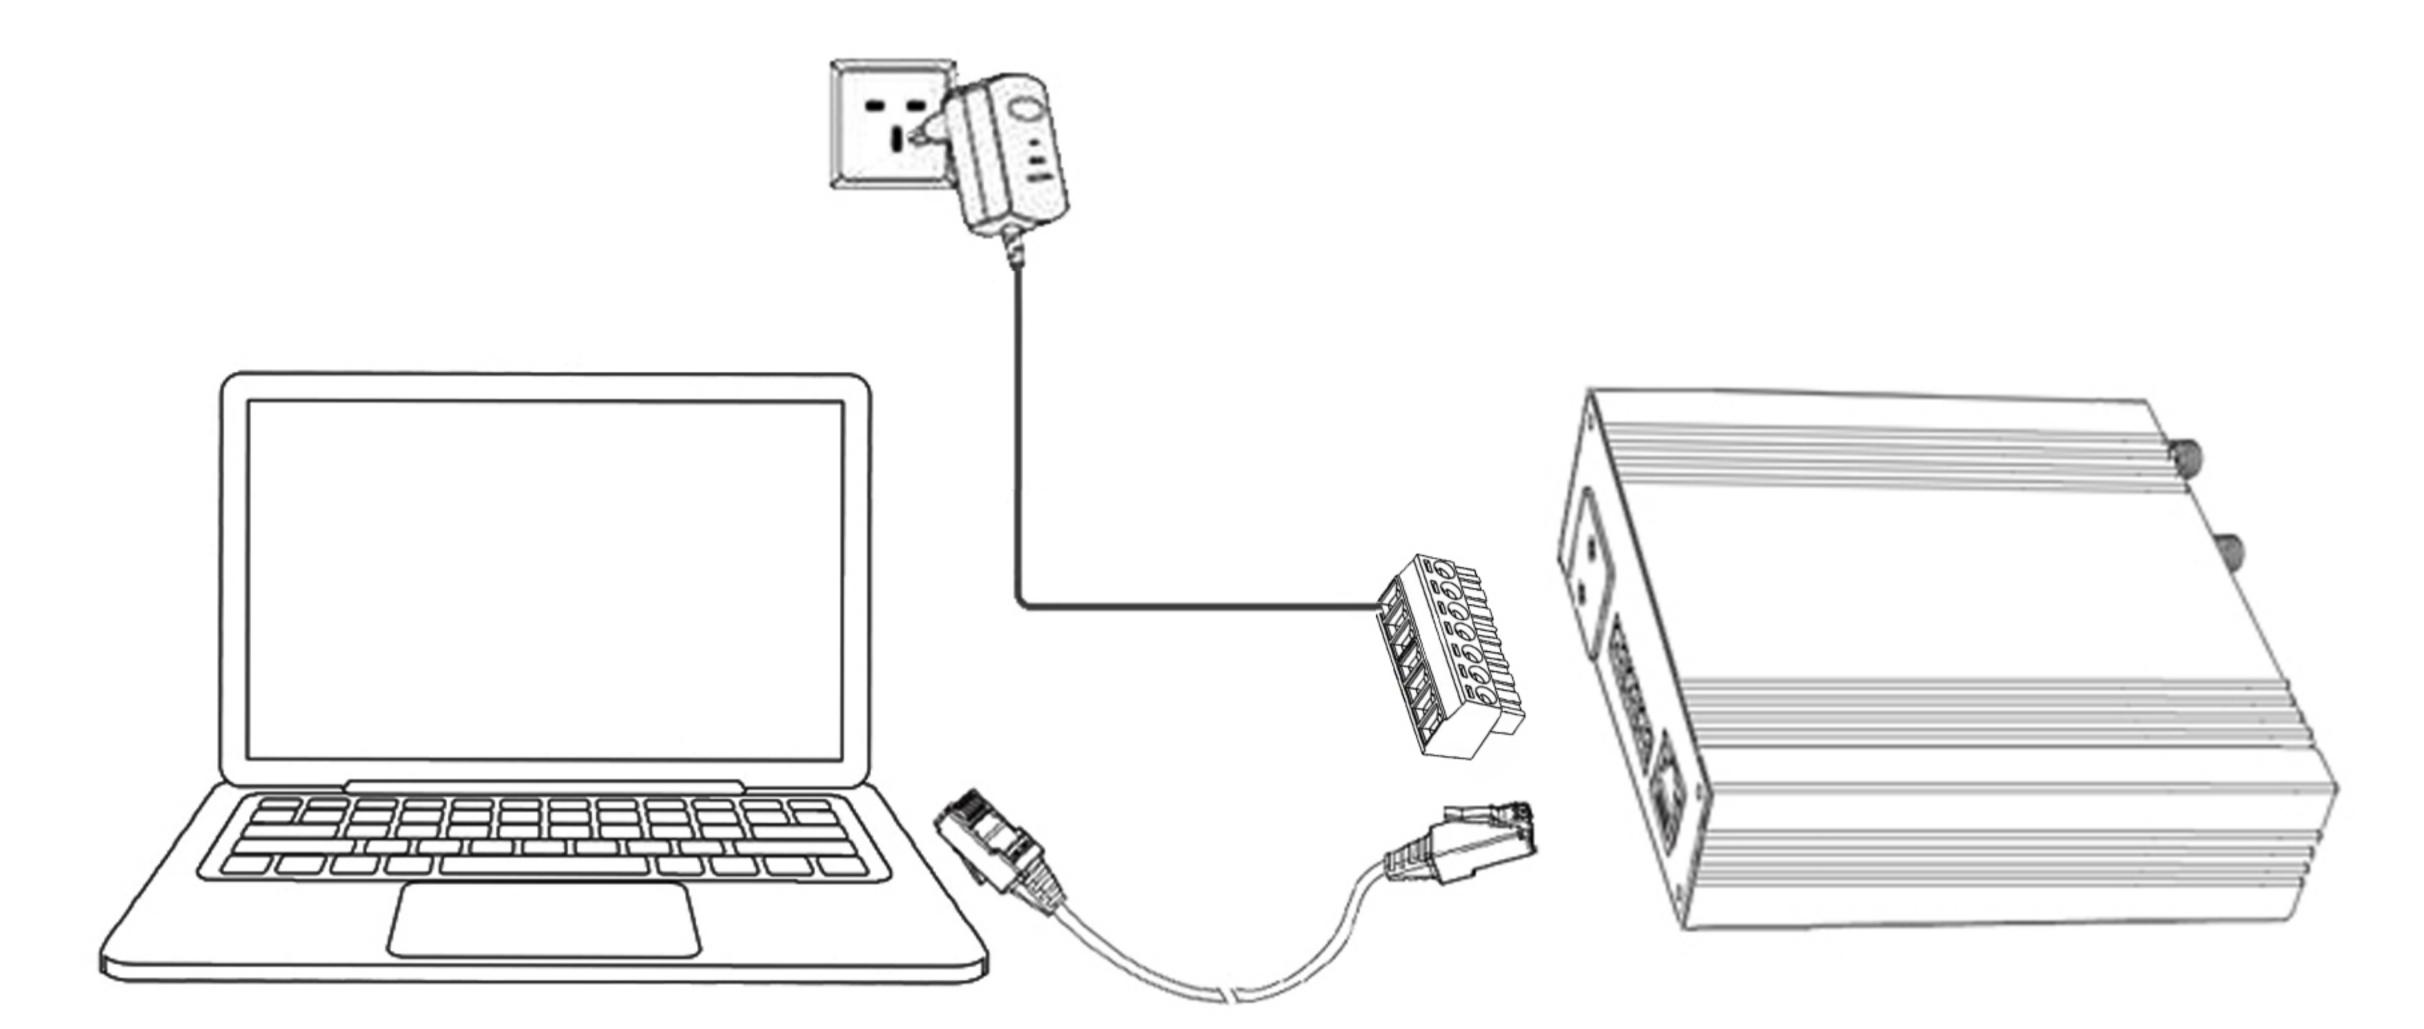

Access the Web page


a. Obtain the IP address

- 1) Please configured your PC to automatically get an IP address.
- 2) Otherwise, make sure your PC can connect to the network 192.168.5.1/24.

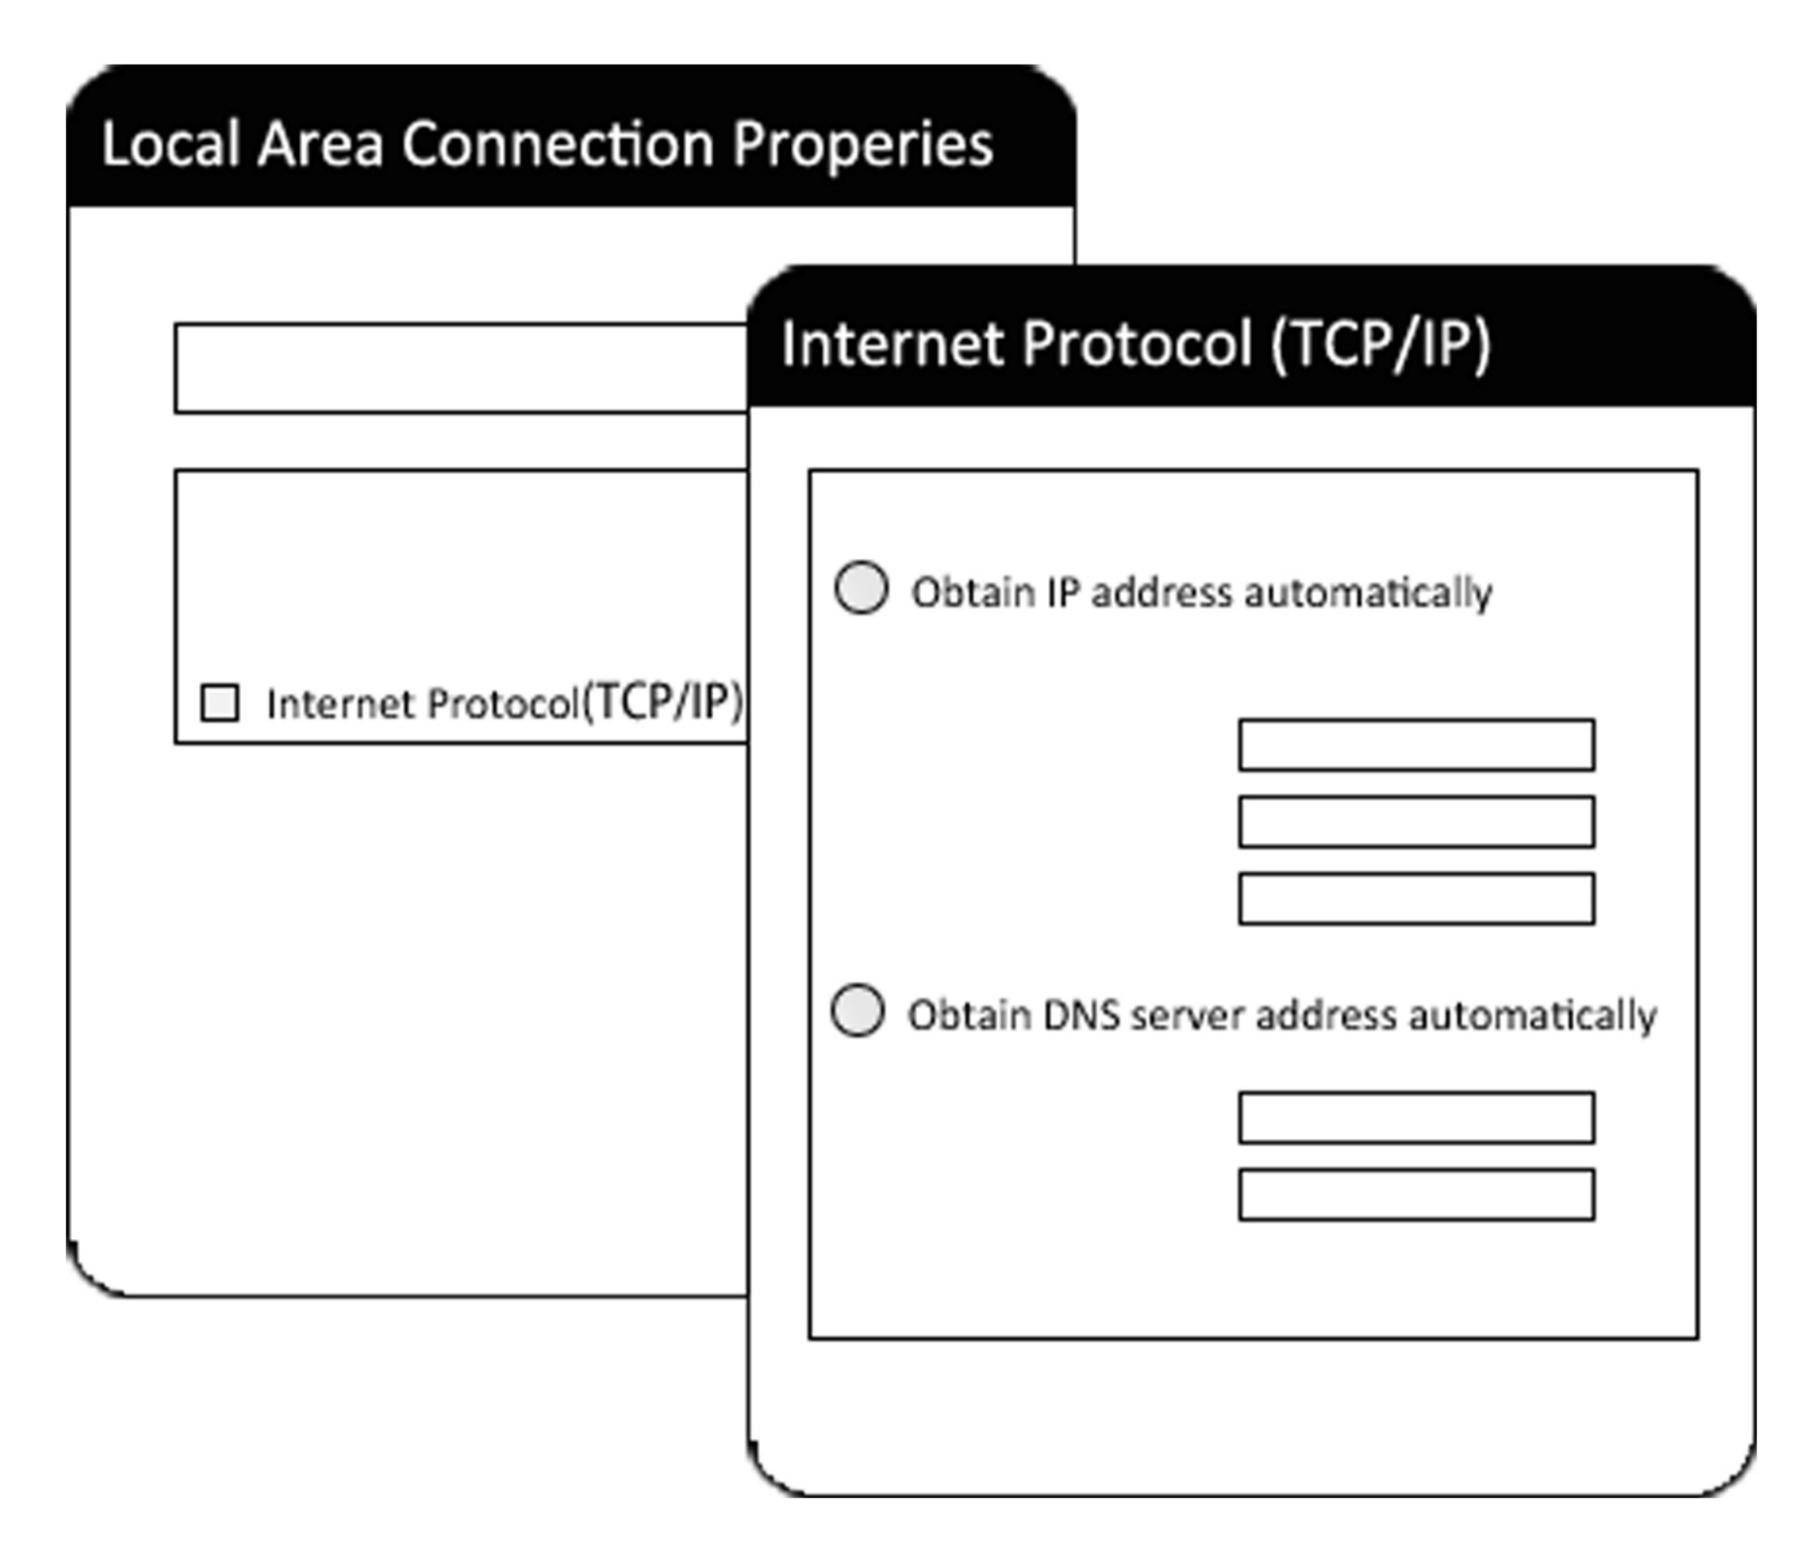

b. Login to web page


- 1) Enter 192.168.5.1 into the address bar of the web browser.
- 2) Then use the default username and password (admin/admin) to log in to the router.

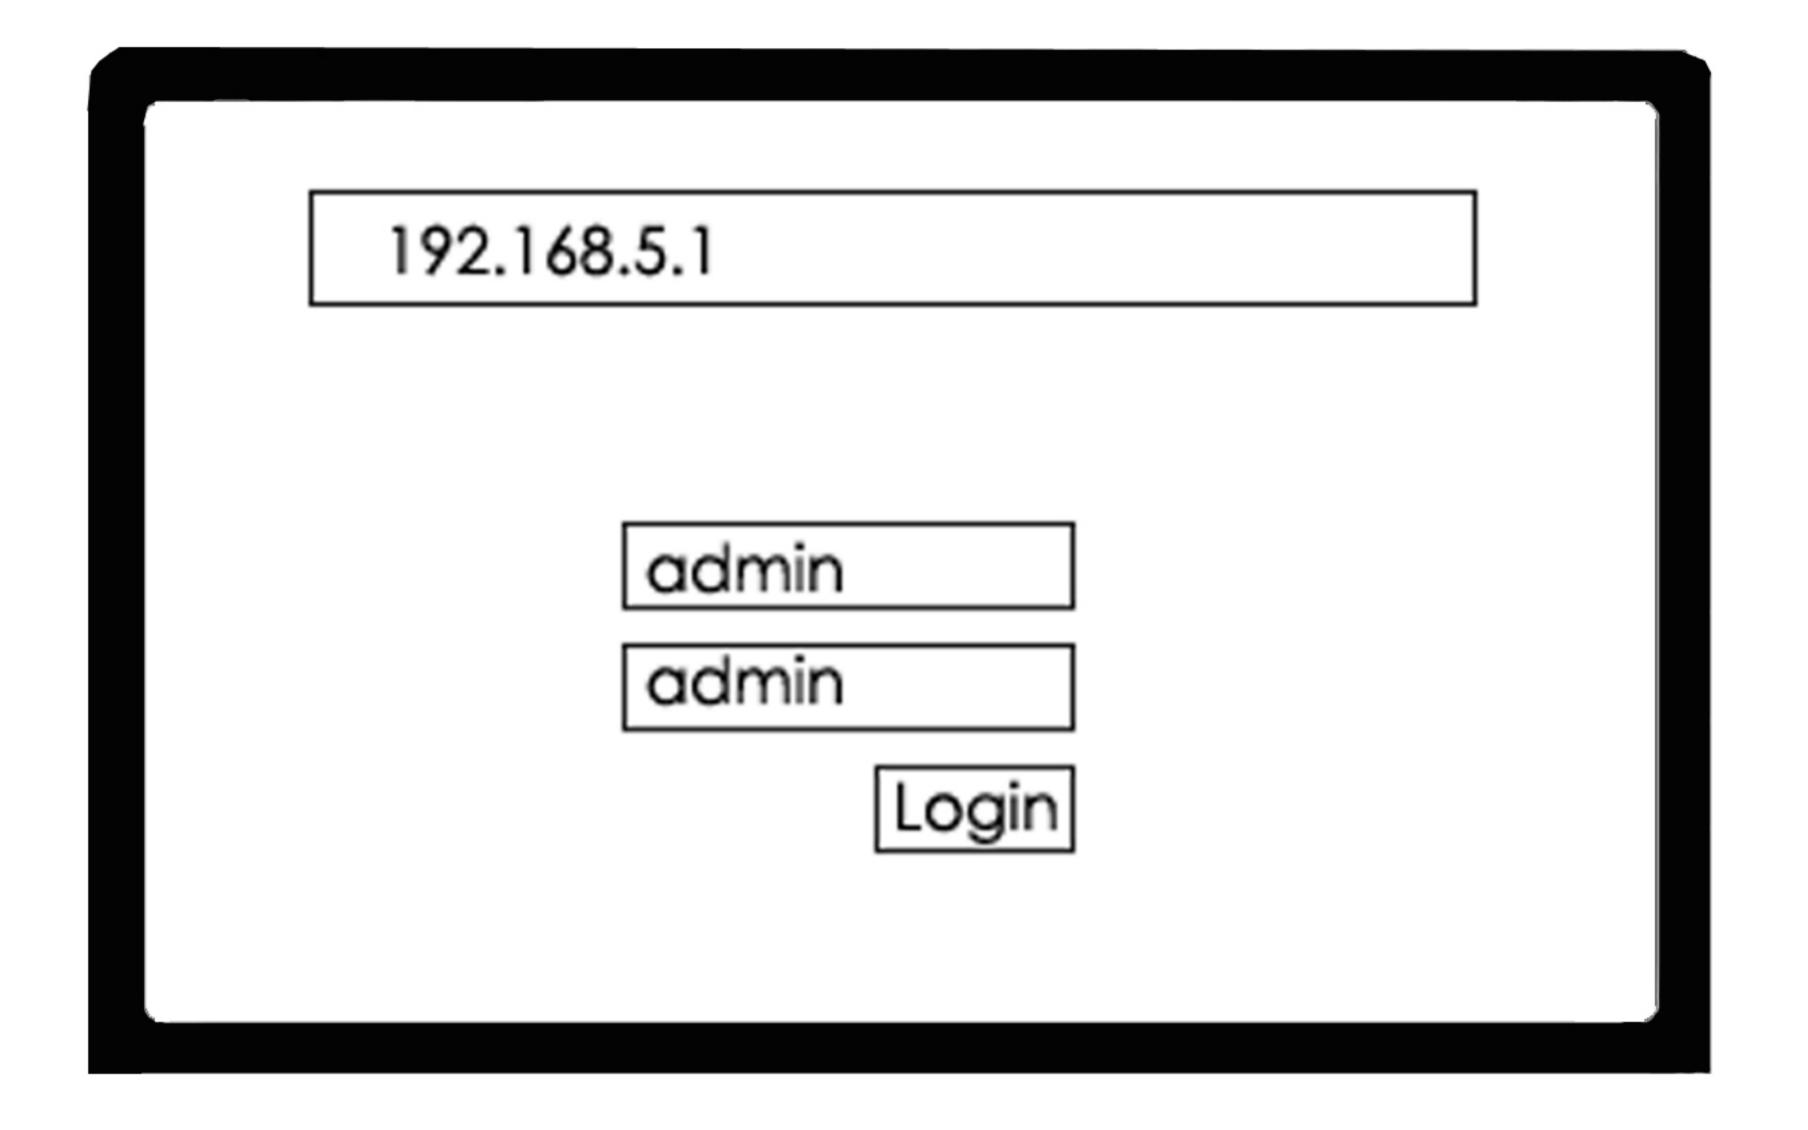





a. DIN-rail installation

- 1) Use 4 pcs of M3×6 flat head phillips screws to fix the DIN-rail to the router.
- 2) Insert the upper lip of the DIN-rail into the DIN-rail mounting kit.
- 3) Press the router towards the DIN-rail until it snaps into place.

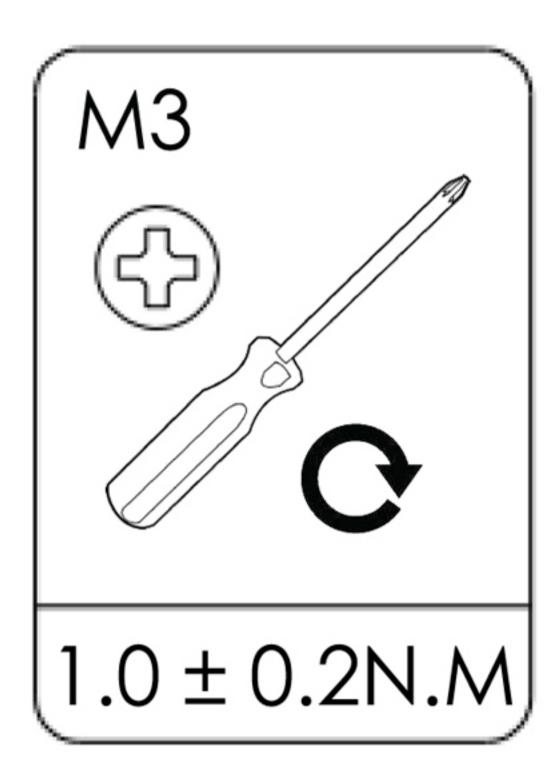

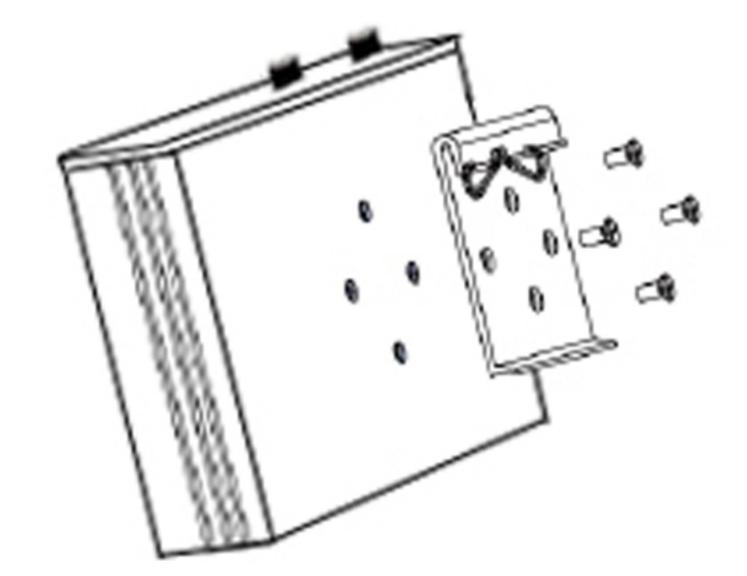



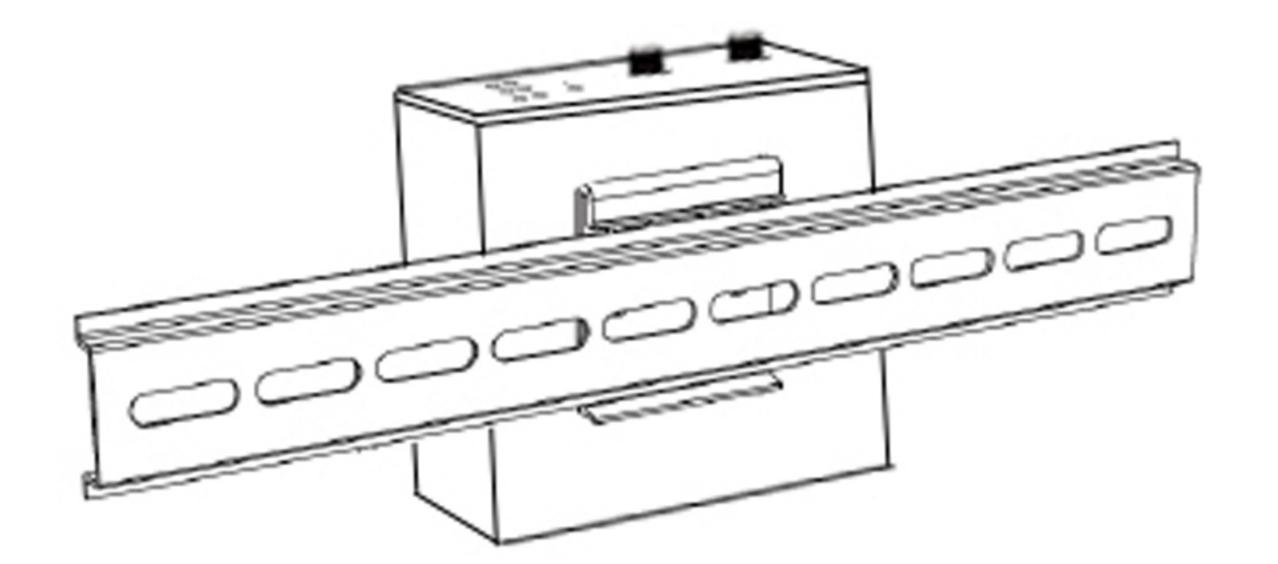

For additional information, please contact Email: support@navigateworx.com

Tel: +86-20-86669763

Web: www.navigateworx.com