

DIREKTRONIK

8-Port 10/100/1000T 802.3at PoE + 2-Port 10/100/1000T + 2-Port 1000X SFP Ethernet Switch

Features

- ▶ 8*1000Mbps POE port, UP-Link 2*1000m port+2*1000m SFP
- ▶ 100m Transmission Distance, 1-8 port support VLAN mode
- ▶ Compatible with IEEE802.3AF/AT
- ▶ Whole Power: 120W (52V 2.3A) Full duplex
- ▶ All port supported by MDI/MDIX auto flip and self-negotiation
- ▶ Supply 8pcs 10/100/1000Mbps adaptive high speed forwarding data packet non-lost port.
- ▶ Each port max. power supply reached 30W.
- ▶ Low heat design, safe and reliable, high stability
- ▶ Application: Wireless Access Point or IP Camera




Overview

The PoE switch provides power and data from a single point, using Power over Ethernet (PoE) over a single Cat-5 cable. It can be used for any 10/100/1000Mbps link and supply industry-standard IEEE 802.3af/at power. Advanced auto-sensing algorithm gives power to 802.3af end devices. In addition, the PoE switch automatically determines PoE requirements, speed, duplex, and cable type using Auto Uplink. Easy to operate and reliable.

The PoE switch is ideal for powering PoE devices such as IP cameras, WLAN access point, IP phones, office access control systems, and other PD devices and offers a line of high quality products that provide a total solution for Ethernet application in different environments.

Application

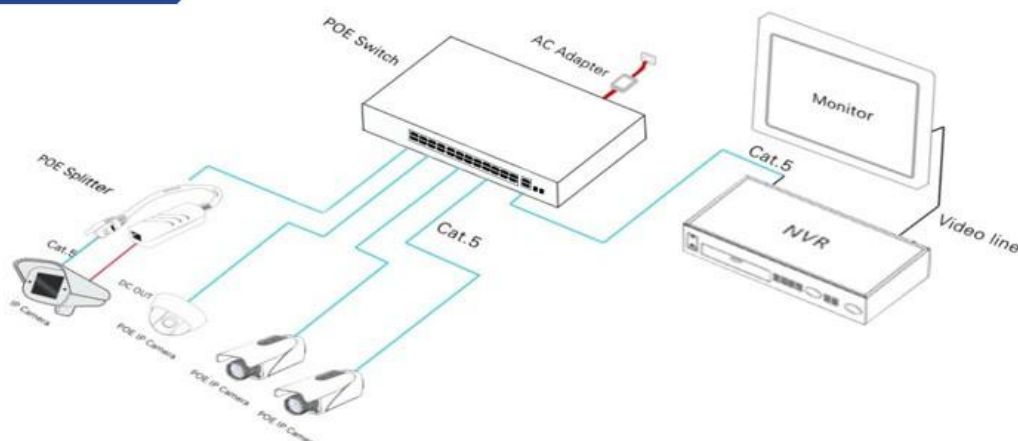

Specifications

Product Name	8 Port Full Gigabit POE Switch (8+2+2)
Product Model	20124559
DATA PIN	1/2+ 3/6- ,4/5+ 7/8-
Power Supply Type	Build In, 1/2+,3/6-
PoE Output Power	30W
Connector	8*1000mbps POE port,2*1000mbps Uplink port,2*1000mpbs SFP
Network Medium	Cat5 (UTP) or more
Technology	
Network Standards	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.3af/at Power over Ethernet
PoE power	30W per port(IEEE802.3af/at). Wiring: power provided over pairs 1/2 and 3/6
Processing types	Store-and-forward Half-duplex back pressure and IEEE 802.3x full-duplex flow control
Address database Table Size	8K MAC address
Buffer memory	48Kb embedded memory per unit
Backboard Bandwidth	20Gpbs Full duplex
Network Latency	Less than 20us for 64 byte frames in store-and-forward mode for 100Mbps to 100Mbps transmission
Power	
Input	AC 110-240V
PoE power consumption	30W per port (IEEE802.3af/at)
Overload current protection	Present
Mechanical	
Casing	Metal
Installation	Wall mounting/ Desktop
Interface	
LED Indicators	System: Power, PoE Maximum power Per port: Link, Activity, Speed, PoE active, PoE error
Environment specification	
Operating temperature	-10-55°C(32-104°F)
Storage temperature	-40-70°C(14-158°F)
Operating humidity	90% maximum relative humidity, non-condensing
Storage humidity	95% maximum relative humidity, non-condensing
Regulatory Approval	
ISO	Manufactured in ISO9001 facility
Safety	CE/CCC
Warranty	2 Years
Dimensions	202*140*45mm (L*W*H)
Weight	N.W:0.9Kg G.W:1.1Kg

Order Information

Model	Description
20124559	8-Port 10/100/1000T 802.3at PoE + 2-Port 10/100/1000T + 2-Port 1000X SFP Ethernet Switch (120 watts)
Mounting Options	► Desktop/Wall-mount

Product Details

Package List	8 Port Full Gigabit POE Switch (8+2+2) *1
	User Guide*1
	Warranty Card*1
	Power cable*1

